


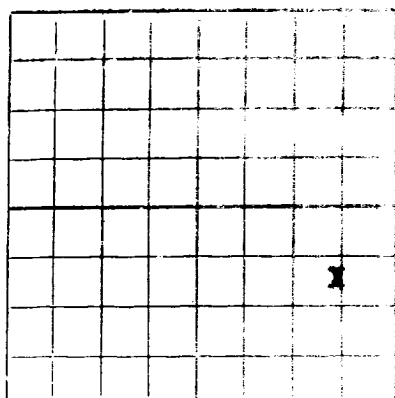

AREA 640 ACRES
LOCATE WELL CORRECTLY

HONDO OIL CONSERVATION COMMISSION

New Mexico

AUG 11 1960

WELL RECORD

O. C. C.
ARTESIA, OFFICE

Mail to the Hondo Oil Conservation Commission, to which Form C-101 was sent not later than 30 days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit 6 COPIES. If State Land submit 6 Copies

Hondo-Western-Yates

(Company or Operator)

State 'A'

(Lease)

Well No. 26, in NE 1/4 of SE 26, T 17-S, R 28-E, NMPM.

Empire Abo Undesignated

Eddy

County.

Well is 1650 feet from South 660 feet from East line

of Section 26. If State Land the Oil and Gas Lease No. 617

Drilling Commenced 7-23-60 Drilling was Completed 8-5-60, 19

Name of Drilling Contractor Yates Drilling Company

Address Artesia, New Mexico

Elevation above sea level at Top of Tubing Head 3656 The information given is to be kept confidential until 19

LOG OF BATHY THERMOGRAPH

No. 1, from 6057 to 6306

No. 2, from to

No. 3, from to

INTERVAL WATER SAMPLES

Include data on rate of water inflow and elevation to which water is lifted

No. 1, from feet

No. 2, from feet

No. 3, from feet

No. 4, from feet

SIZE	WEIGHT PER FOOT	NEW OR USED	DEPTH	TYPE OF LOG	LOG AND LOGGED FROM	PERFORATIONS	PURPOSE
8-5/8"	28#	Used	731'	Float			Surface
5-1/2"	15.5#	New	6317'	Float			Oil String

MAINTENANCE AND REPAIRS RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SAKES OF CEMENT	TYPE OF PUMP	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	731'	375	Pump - Plug		
7-7/8"	5-1/2"	6317'	660	Pump - Plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of jobs, days, interval treated or shot.)

Treated formation thru perforations at 6188 - 6210

with 3,000 gallons 15% reg. acid with DS-50 added.

Result of Production Stimulation 180 bbls. oil in 10 hrs. thru a 16/64" choke.

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 60 feet to 6317 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 8-5-60, 19

OIL WELL: The production during the first 24 hours was 432 barrels of liquid of which 99.8 % was oil; 0 % was emulsion; 0 % water; and .2 % was sediment. A.P.I. Gravity 43.1

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy		T. Devonian	T. Ojo Alamo
T. Salt		T. Silurian	T. Kirtland-Fruitland
B. Salt		T. Montoya	T. Farmington
T. Yates		T. Simpson	T. Pictured Cliffs
T. 7 Rivers	883	T. McKee	T. Menefee
T. Queen	1457	T. Ellenburger	T. Point Lookout
T. Grayburg	1865	T. Gr. Wash	T. Mancos
T. San Andres	2160	T. Granite	T. Dakota
T. Glorieta		T.	T. Morrison
T. Drinkard		T.	T. Penn
T. Tubbs		T.	T.
T. Abo	6057	T.	T.
T. Penn		T.	T.
T. Miss		T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	560'	560'	Red bed and Gyp	OIL CONSERVATION COMMISSION ARTESIA DIST. OFFICE No. 125-10-1001 / 1 DATE 8-11-60 REGION 4 SANTA FE 1 FLORATION OFFICE STATE LAND OFFICE 1 U. S. G. S. 2 TRANSPORTER FILE 1 ✓ BUREAU OF MINES 1			
560'	979'	419'	Anhy and Gyp				
979'	2061'	1082'	Anhy and Bolo.				
2061	4001'	1940'	Bolo. and Chert				
4001'	4178'	177'	Lime and Dolo.				
4178'	6048'	1870'	Chert and Dolo.				
6048'	6304'	256'	Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator Hondo Oil & Gas Company Address Box 125, Artesia, New Mexico
Name A. J. Reano by L. M. Edgmon Position Title Dist. Prod. Supt.
8-11-60 (Date)