


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

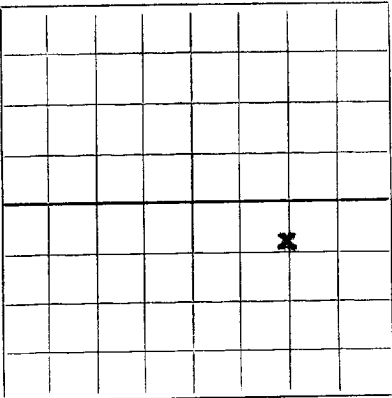

AREA 640 ACRES
LOCATE WELL CORRECTLY

Stanolind Oil and Gas Company
(Company or Operator)

State "AB"
(Lease)

Well No. 1, in NW 1/4 of SE 1/4, of Sec. 29, T. 17-S, R. 28-E, NMPM.
Wildcat Pool, Eddy County.

Well is 1980 feet from East line and 1980 feet from South line
of Section 29. If State Land the Oil and Gas Lease No. is 647

Drilling Commenced March 5, 1953. Drilling was Completed 8-14-53, 19

Name of Drilling Contractor Noble Drilling Company
Address Tulsa, Oklahoma

Elevation above sea level at Top of Tubing Head 3702'. The information given is to be kept confidential until
Not confidential, 19

Gas
SANDS OR ZONES

No. 1, from 10102 to 10127 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8"	48	New	523'	Float	-	-	Surface string
9-5/8"	32.24	New	1993	Float	-	-	Intermediate String
7"	26	New	10431'	Float	-	10102 - 10127	Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2"	13-3/8"	539'	500 sz.	Howeo Plug		
12-1/4"	9-5/8"	2003'	150 sz.	Howeo Plug		
8-3/4"	7"	10370'	400 sz. / 300 cu. ft.	Howeo Plug perlite		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

CORRECTED REPORT

1500 gal acid treatment shown on original report in error.

Result of Production Stimulation See Reverse Side.

Depth Cleaned Out

WORD OF DRILL-STEM AND SPECIAL T

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 12431 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Shut-In. Waiting on market outlet.
Put to Producing, 19
OIL WELL: The production during the first 24 hours was barrels of liquid of which % was
was oil; % was emulsion; % water; and % was sediment. A.P.I.
Gravity.
GAS WELL: The production during the first 24 hours was 30,000 M.C.F. plus 26 Per MMCF barrels of
liquid Hydrocarbon. Shut in Pressure 4052 psi lbs.
Length of Time Shut in.

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.	T. Devonian.	11065	T. Ojo Alamo.
T. Salt.	T. Silurian.		T. Kirtland-Fruitland.
B. Salt.	T. Montoya.	11690	T. Farmington.
T. Yates.	T. Simpson.	11880	T. Pictured Cliffs.
T. 7 Rivers.	T. McKee.		T. Menefee.
T. Queen.	T. Ellenburger.	12060	T. Point Lookout.
T. Grayburg.	T. Gr. Wash.		T. Mancos.
T. San Andres.	T. Granite.		T. Dakota.
T. Glorieta.	T. Wolfcamp.	6795	T. Morrison.
T. Drinkard.	T.		T. Penn.
T. Tubbs.	T.		T.
T. Abo.	T.		T.
T. Penn.	T.		T.
T. Miss.	T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	635	635	Red Bed				
635	906	271	Lime				
906	1530	624	Lime and anhydrite				
1530	4894	3364	Lime				
4894	5023	129	Lime and sand				
5023	5603	580	Lime				
5603	5938	335	Lime and shale				
5938	7617	1679	Lime				
7617	7642	25	Lime and chert				
7642	8201	559	Lime and shale				
8201	9788	1587	Lime				
9788	9813	25	Lime and chert				
9813	9907	94	Lime				
9907	10154	247	Lime and shale				
10154	10230	76	Lime				
10230	10540	310	Lime and shale				
10540	10727	187	Lime				
10727	10894	167	Lime and chert				
10894	11051	157	Lime				
11051	11069	18	Lime and shale				
11069	11115	46	Lime and chert				
11115	11983	868	Lime				
11983	12053	70	Sand, shale and lime				
12053	12431	378	Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

September 23, 1953

Company or Operator Stanolind Oil and Gas Company Address Box 68, Hobbs, New Mexico (Date)
Name Ralph Pennington Position or Title Field Superintendent