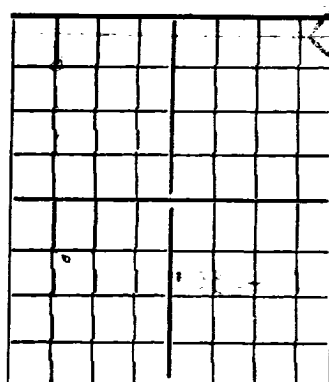


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

W. D. CUNNINGHAM

Artesia, New Mexico

State Quinn Company or Operator 1 Well No. 28E in NE 1/4 SW 1/4 of Sec. 30, T. 17S, R. 28E, N. M. P. M., Red Lakes Field, Eddy County.
Well is 330 feet south of the North line and 430 feet east of the East line 30-17S-28E
If State land the oil and gas lease is No. B-5306 Assignment No. _____
If patented land the owner is _____, Address _____
If Government land the permittee is _____, Address _____
The Lessee is W. D. Cunningham, Address Artesia, N. M.
Drilling commenced January 24, 1942 Drilling was completed February 9, 1942
Name of drilling contractor Otis Roberts, Address Artesia, N. M.
Elevation above sea level at top of casing _____ feet.
The information given is to be kept confidential until _____ 19____.

OIL SANDS OR ZONES

No. 1, from 513 to 518 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 240 to 250 feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
<u>8"</u>	<u>20 lb</u>			<u>389</u>		<u>(PULLED)</u>		
<u>5-1/2"</u>	<u>15 lb</u>			<u>508</u>				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>10"</u>	<u>8"</u>	<u>389</u>	<u>Mudded</u>	<u>pulled later</u>		
<u>7"</u>	<u>5-1/2"</u>	<u>508</u>	<u>12 sx</u>			

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		<u>Acid</u>	<u>500 gals</u>	<u>2-14-42</u>		

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from T.D. feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing February 21, 1942.
The production of the first 24 hours was 250 barrels of fluid of which 100 % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

C. H. BRASLEY, Driller _____, Driller
Harry Elson, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 25thday of February, 1942Detanche McG...
Notary Public

Artesia, N. M. February 25, 1942

Name W. D. CunninghamPosition W. D. CUNNINGHAMRepresenting Self

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	59		Red Beds
59	90		Red Beds & Gyp
90	122		Anhydrite
122	135		Gyp
135	150		Anhydrite
150	195		Lime, Anhydrite & Gyp
195	253		Red Beds & Sand - HFW 240-250'
253	290		Red Beds
290	300		Anhydrite
300	310		Red Beds
310	345		Red Beds & Anhydrite
345	352		Anhydrite
352	383		Anhydrite
383	425		Anhydrite
425	440		Red Beds, Anhydrite Breaks
440	495		Anhydrite
495	506		Brown Lime, broken - OIL SHOW
506	510		Anhydrite & Gyp
510	515		Brown Lime - OIL SHOW 513-18
515	520		Broken Bed
520	524		Gray Lime
524	532		Brown Lime
532	544		Lime & Gyp
Plugged back to 544' - T.D.			