



IN REPLY REFER TO:

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY  
P. O. Box 187  
Artesia, New Mexico

December 5, 1956

Mr. John H. Trigg  
Box 5629  
Roswell, New Mexico

Re: Oil and Gas Lease  
New Mexico 04711


Dear Mr. Trigg:

Your "Subsequent Report of Abandonment" covering your well No. 1-15 Federal "H" located 660 feet from south and west lines of section 16, T. 16 S., R. 29 E., High Llanos Pool, Eddy County, New Mexico, is hereby approved.

Very truly yours,

John A. Frost  
District Engineer

JAF:mm

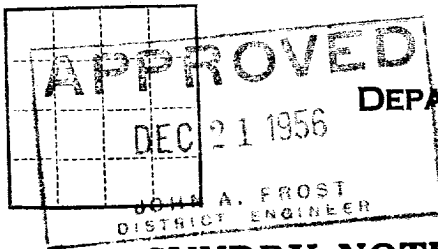

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office New Mexico  
Lease No. 04711  
Unit \_\_\_\_\_

**SUNDRY NOTICES AND REPORTS ON WELLS**

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

October 17, 1956

Federal "H" Lease  
Well No. 1-15 is located 660 ft. from N line and 660 ft. from W line of sec. 15

SW 1/4 SW 1/4 Sec. 15 16-S 22-S N.M.P.M.  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
High Lonesome Sddy New Mexico  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 3689 ft.

**DETAILS OF WORK**

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

1. Filled open hole below 5 1/2" casing with heavy Aquagel mud 1959' - 1900'.
2. Shot off 5 1/2" casing at 1457' and pulled same.
3. Set 10 sack cement plug 1465' up.
4. Filled open hole above plug with heavy Aquagel mud.
5. Set 10 sack plug 400' upwards, in base 8-5/8" casing.
6. Shot off 8-5/8" casing at 96', set 10 sack plug, 100' upwards.
7. Filled balance of hole with heavy Aquagel mud.
8. Set 5 sack plug at surface and erected marker pipe.

All mudding and cementing work was with use of a Halliburton pump truck.  
Will notify by letter when pits are ready for inspection.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company John H. Trigg

Address P. O. Box 5629

Roswell, New Mexico

By Langford R. Pickett

Title Geologist