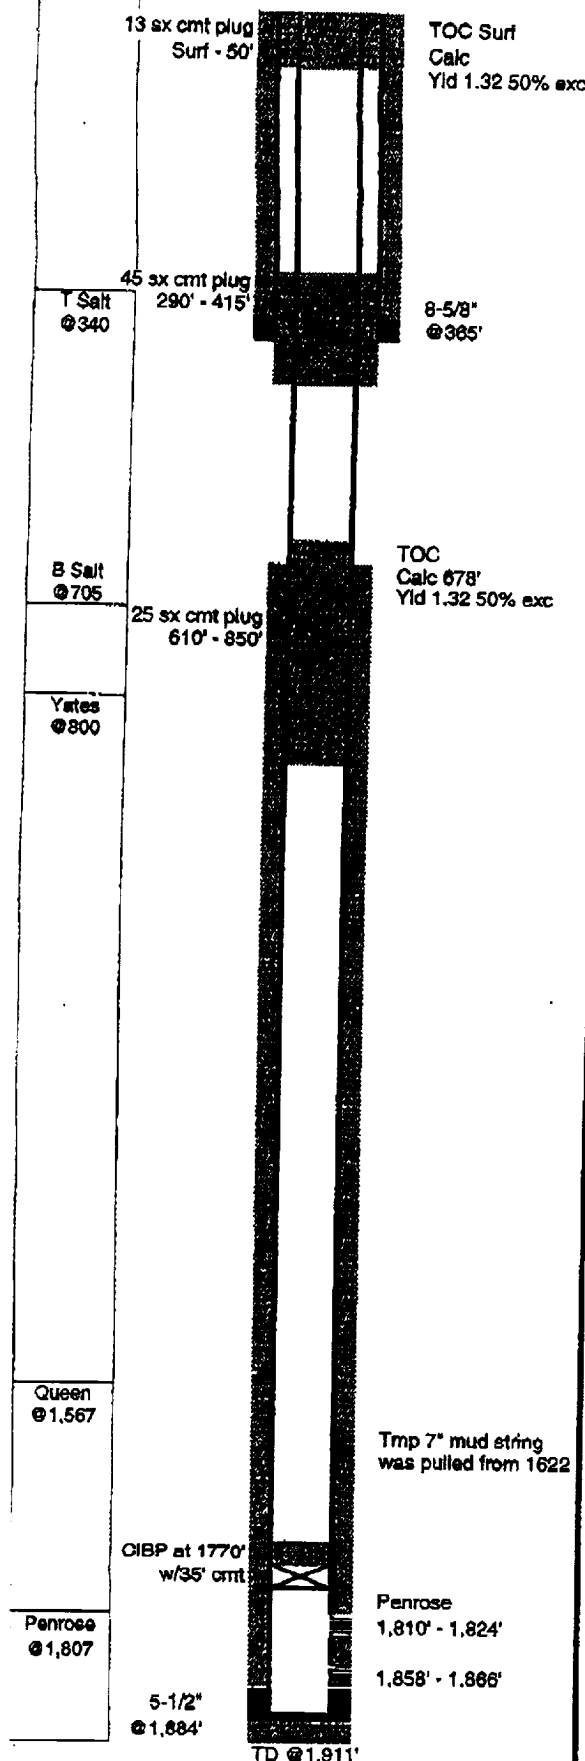


**Brainard Federal #1**

GL: 3,616
KB: 3,617
TD: 1,911
PBD: 1,884
Fr. Wtr:
Legal:

Status: Inactive Producer
Perfs: 1,810' - 1,866'

API: 30-015-02781

Legal: 1,980 from E
680 from S

NM Lse:
Field: High Lonesome (Penrose)

Section: 20-O
Township: 16S
Range: 29E
County: Eddy

Logs:

Archeological:

Casing	Wt	Type	Set	Cmt	Hole	TOC	Method
8-5/8"	28.00	H40 S.H.	365	75	10"	Surf	Calc yld 1.32
7"			1,622	NONE	8"	Trp Mud	String Pulled
5-1/2"	14.00	J55	1,884	225	6 1/2"	640	Calc yld 1.32 50% excess

14-May-56 Spud well
Utex Exploration Co. - Brainard Federal #1

Penrose Completion
14-Jan-57 Perf: 1810 - 1824 (36 holes) and 1858 - 1866 (32 holes)
Sand Oil fraced w/8Mgal lsc crude and 15.5M# sand

21-Oct-60 Subsequent test: CAOF 590 MCFPD, last rate 520 MCFPD 24/64' chk 126 psi F

Brainard Federal #1 Plugging Procedure

- 1 POOH w/tubing
- 2 RIH w/bit & scraper to perfs, POOH
- 3 RU Wireline, RIH w/WL set CIBP, set at 1770', POOH
- 4 RIH w/bailer and dump 35' cmt on CIBP, POOH
- Subsequent Plugging Operations anticipated in March 2002
- 5 RU Well Pluggers, RIH to CIBP
- 6 Load hole w/10ppg mud
- 7 Pull pipe to 850', pump 25sx cmt plug (cover 610' - 850') (Yates & Bess Salt plug)
- 8 POOH w/pipe, RIH and perforate 5 1/2" csg at 415'
- 9 RIH w/pipe to 415', pump 45sx cmt plug (cover 290'-415') (Surf csg shoe plug)
- 10 Tag surf csg shoe plug
- 11 Cutoff wellhead 3' below surface
- 12 Pump 13sx surface plug in 5 1/2" csg and 8 5/8" x 5 1/2" annulus from surf to 50'
- 13 Install 4" dry hole marker w/4' above ground w/required info stenciled on pipe

TUBING STRING

# OF JTS	DESCRIPTION	LENGTH	FROM	TO
	Distance from KB to top of pipe	1.00	0.00	1.00

Tubing in hole according to Rex Busby (505) 397-4646
former Eunice Well Service man

ROD STRING

# OF JTS	SIZE	TYPE OF RODS	LENGTH
----------	------	--------------	--------