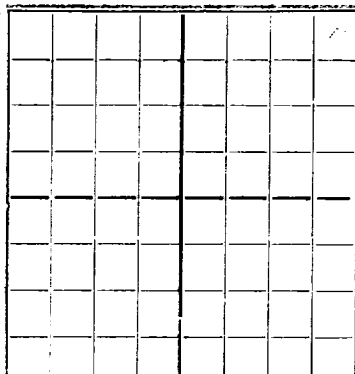


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Forest E. Levers Levers B
Company or Operator Lease
Well No. B-6 in SE of Sec. 34 T. 16 S.
R. 29 E., N. M. P. M., Forest Field, Eddy County.
Well is 3150 feet south of the North line and 660 feet west of the East line of Sec. 34
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is Forest E. Levers Address Roswell, New Mexico
The Lessee is Forest E. Levers Address Roswell, New Mexico
Drilling commenced May 8 1947 Drilling was completed June 23 1947
Name of drilling contractor Louis Dunham Address Artesia, New Mexico
Elevation above sea level at top of casing 3657 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 1425 to 1435 No. 4, from 2617 to 2641
No. 2, from 2075 to 2080 No. 5, from to
No. 3, from (G) 2346 to 2351 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from N to feet.
No. 2, from 0 to feet.
No. 3, from N to feet.
No. 4, from E to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8 1/2		8		386	Texas			Surface
5 1/2	15 lb.	10		2473	Texas			Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
8"	5-3/16	2472'	100	Haliburton		
	8 1/2	386'	25	Haliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
100 qt	4"	Nitroglycerin	100 qt	6-18-47	2661	2245

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet.
Cable tools were used from 0 feet to 2693 feet, and from feet to feet.

PRODUCTION

Put to producing 19
The production of the first 24 hours was 150 barrels of fluid of which 100 % was oil; 0 % emulsion; 0 % water; and 0 % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in. 750

EMPLOYEES

P. W. Clifford Driller A. E. Early Driller
D. T. Inman Driller Louis Dunham Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 19th

Roswell, N.M.

day of July, 1947

Name Louis G. Leven

Position Manager

Representing Forest E. Levers

Company or Operator.

My Commission expires Jan 21, 1950.

Address Box 784 Roswell, NM.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	75	75	Red Rock
75	195	120	Red Bed
195	200	5	Gypsum
200	245	45	Anhydrite
245	300	55	Anhydrite - Red Rock
300	340	40	Red Bed - Anhydrite
340	385	45	Red Rock - Anhydrite
385	445	60	Salt
445	505	60	Salt - Ptoash
505	640	135	Salt
640	755	115	Salt - Potash
755	815	60	Salt
815	860	45	Salt - Anhydrite
860	910	50	Anhydrite - Lime
910	980	70	Anhydrite
980	1150	170	Anhydrite - Red Rock
1150	1185	35	Anhydrite
1185	1250	65	Anhydrite - Red Rock
1250	1285	35	Anhydrite
1285	1310	25	Lime - Anhydrite
1310	1345	35	Anhydrite & Shale
1345	1570	225	Anhydrite
1570	1650	80	Anhydrite - Red Rock
1650	1685	35	Anhydrite (Broken)
1685	1825	140	Anhydrite
1825	1860	35	Red Sand - Anhydrite
1860	1925	65	Anhydrite
1925	1950	25	Anhydrite - Brown Shale
1950	1970	20	Anhydrite
1970	2000	30	Anhydrite - Red Rock
2000	2030	30	Broken Anhydrite
2030	2055	25	Anhydrite
2055	2075	20	Anhydrite
2075	2080	5	Sand
2080	2085	5	Anhydrite
2085	2095	10	Blue Shale
2095	2115	20	Anhydrite & Red Shale
2115	2195	80	Anhydrite
2195	2285	70	Anhydrite & Lime Shells
2285	2270	5	Anhydrite
2270	2285	15	Lime
2285	2305	20	Lime & Anhydrite
2305	2320	15	Lime
2320	2330	10	Lime, gray
2330	2390	60	Lime
2390	2414	24	Lime, gray
2414	2459	45	Lime
2459	2473	14	Lime, gray
2473	2494	21	Lime
2494	2505	11	Lime, gray
2505	2520	15	Lime - Red Shale
2520	2545	25	Red Shale - Sand
2545	2570	25	Lime
2570	2576	6	Lime, White
2576	2595	19	Lime
2595	2605	10	Lime, white
2605	2622	17	Lime
2622	2637	15	Sand
2637	2692	55	Lime