

NEW MEXICO OIL CONSERVATION COMMISSION
SANTA FE, NEW MEXICO

JAN 28 1960


WELL RECORD

O. C. C.

ARTESIA, OFFICE

MAIL TO DISTRICT OFFICE, OIL CONSERVATION COMMISSION, TO WHICH FORM C-101 WAS SENT NOT LATER THAN TWENTY DAYS AFTER COMPLETION OF WELL. FOLLOW INSTRUCTIONS IN RULES AND REGULATIONS OF THE COMMISSION. SUBMIT IN QUINTUPLICATE.

Unit
"ft"

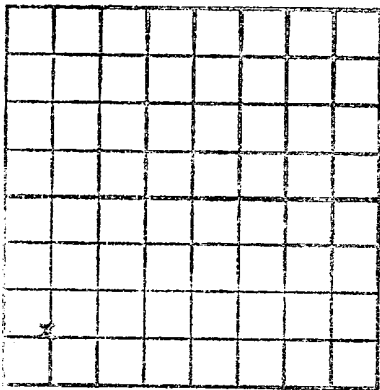

AREA 640 ACRES
LOCATE WELL CORRECTLY

Humble Oil & Refining Company
(COMPANY OR OPERATOR)
WELL NO. 2 IN SW 1/4 OF SW 1/4 OF SEC. 2 T.16-S R. 20-E N.M.W.
West Henshaw Grayburg Lundering POOL, Eddy COUNTY.
WELL IS 660 FEET FROM West LINE AND 660 FEET FROM South LINE
OF SECTION 2 IF STATE LAND THE OIL AND GAS LEASE NO. IS B-5121
DRILLING COMMENCED December 13, 1959 DRILLING WAS COMPLETED December 26, 1959
NAME OF DRILLING CONTRACTOR Yates Drilling Company
ADDRESS Artesia, New Mexico
ELEVATION ABOVE SEA LEVEL AT TOP OF TUBING HEAD 3893 FT THE INFORMATION GIVEN IS TO BE
KEPT CONFIDENTIAL UNTIL Not Confidential 19

OIL SANDS OR ZONES

NO. 1, FROM 2928 TO 2926 NO. 4, FROM TO
NO. 2, FROM TO NO. 5, FROM TO
NO. 3, FROM 0 TO NO. 6, FROM TO

IMPORTANT WATER SANDS

INCLUDE DATA ON RATE OF WATER INFLOW AND ELEVATION TO WHICH WATER ROSE IN HOLE.

NO. 1, FROM TO FEET.
NO. 2, FROM TO FEET.
NO. 3, FROM TO FEET.
NO. 4, FROM TO FEET.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	OUT AND PULLED FROM	PERFORATIONS	PURPOSE
7-5/8	26.4	New	495	HOWCO	=	=	Surface
2-7/8	6.50	New	2973	HOWCO	-	2928-2936	Oil
Fiberglass Completion							

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11	7-5/8	505	425	Pumped	=	=
6-3/4	2-7/8	2983	150	Pumped	=	=

RECORD OF PRODUCTION AND STIMULATION

(RECORD THE PROCESS USED, NO. OF QTS. OR GALS. USED, INTERVAL TREATED OR SHOT)

Frac perforations in 2-7/8" casing 2928-2936 w/ 15,000 gals. Humble Frac and 30,000# sand.

RESULT OF PRODUCTION STIMULATION After recovering all load oil well produced at rate of 1.2 Bbls. PLO in 4 hours on potential test. Choke size 1/2", casing pressure 60%, GOR 120.

DEPTH CLEANED OUT

