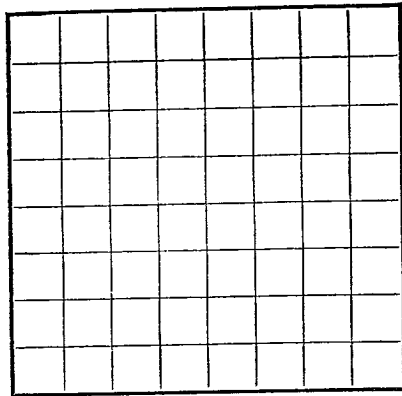


Form 9-330

U. S. LAND OFFICE Las Cruces
SERIAL NUMBER 069641
LEASE OR PERMIT TO PROSPECT _____

RECEIVED

JAN 3 1961
U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

UNITED STATES

RECEIVED

JAN 5 1961

D. O. C.
ARTESIA, N. M.

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company John H. Trigg Address P. O. Box 5629 Roswell, New Mexico
Lessor or Tract Federal "P" Field W. Henshaw GB State New Mexico
Well No. 8-10 Sec. 10 T. 16S R. 30E Meridian N.M.P.M. County Eddy
Location 330 ft. XXX of N Line and 990 ft. XXX of W Line of Section 10 Elevation 3849
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon
so far as can be determined from all available records.

Signed Hyge W. P. HuntDate July 22, 1959Title Geologist

The summary on this page is for the condition of the well at above date.

Commenced drilling May 24, 19 59 Finished drilling June 24, 19 59

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from 2165 to 2190 No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>10 3/4"</u>	<u>32#</u>		<u>J-55</u>	<u>451</u>	<u>Texas Pattern</u>				
<u>8 5/8"</u>	<u>24#</u>		<u>J-55</u>	<u>2208</u>	<u>Texas Pattern</u>				
<u>5 1/2"</u>	<u>14#</u>		<u>J-55</u>	<u>2911</u>	<u>Guide</u>				

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>10 3/4"</u>	<u>456</u>	<u>75</u>	<u>Pump</u>		
<u>8 5/8"</u>	<u>2212</u>	<u>Mudded</u>	<u>Pump</u>	<u>heavy</u>	<u>25-sx-gel</u>
<u>5 1/2"</u>	<u>2913</u>	<u>100</u>	<u>Pump</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____

Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

Cable tools were used from 0 feet to 2914 feet, and from _____ feet to _____ feet

DATES

December 16, 19 60 Put to producing—Temporarily Abandoned 9/28/60

The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

O. E. Wood, Driller J. C. Tripplehorn, DrillerA. F. Fruit, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
<u>0</u>	<u>35</u>	<u>35</u>	<u>Sand and Caliche</u>
<u>35</u>	<u>300</u>	<u>265</u>	<u>Red beds</u>
<u>300</u>	<u>430</u>	<u>130</u>	<u>Red beds and anhydrite</u>
<u>430</u>	<u>1190</u>	<u>760</u>	<u>Salt</u>
<u>1190</u>	<u>1365</u>	<u>175</u>	<u>Anhydrite</u>
<u>1365</u>	<u>1430</u>	<u>65</u>	<u>Red Sand and shale</u>
<u>1430</u>	<u>2165</u>	<u>735</u>	<u>Anhydrite</u>
<u>2165</u>	<u>2210</u>	<u>45</u>	<u>Red sand and shale. H.F.W. 2165-70</u>
<u>2210</u>	<u>2560</u>	<u>350</u>	<u>Anhydrite & red beds</u>
<u>2560</u>	<u>2805</u>	<u>245</u>	<u>Anhydrite, lime and red beds</u>
<u>2805</u>	<u>2830</u>	<u>25</u>	<u>Lime</u>
<u>2830</u>	<u>2865</u>	<u>35</u>	<u>Red sand, anhydrite, lime</u>
<u>2865</u>	<u>2908</u>	<u>43</u>	<u>Sand</u>
<u>2908</u>	<u>2914</u>	<u>6</u>	<u>Lime</u>
			<u>2914' T. D.</u>
Summary of G.R.-N. Log tops:			
	<u>Salt</u>	<u>415</u>	
	<u>Base Salt</u>	<u>1178</u>	
	<u>Yates</u>	<u>1373</u>	
	<u>Queen P</u>	<u>2164</u>	
	<u>Grayburg</u>	<u>2558</u>	
	<u>San Andres</u>	<u>2906</u>	

