


Form 9-330

U. S. LAND OFFICE New Mexico
SERIAL NUMBER 04068
LEASE OR PERMIT TO PROSPECT Federal Sivley

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

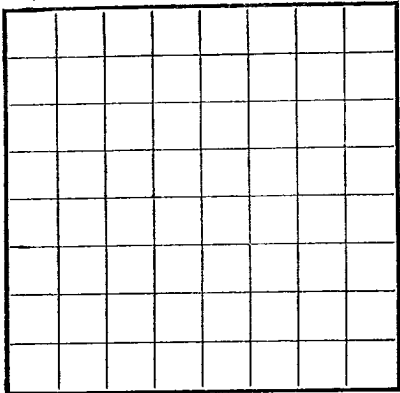

LOCATE WELL CORRECTLY

LOG OF OIL OR GAS WELL

Company General American Oil Co., of Texas Address P. O. Box 416, Loco Hills, N. M.
Lessor or Tract Federal Sivley Field Undesignated State New Mexico
Well No. 6 Sec. 17 T16-S. R. 30-E Meridian N.M.P.M. County Eddy
Location 660 ft. S. of N. Line and 660 ft. W. of E. Line of Section 17 Elevation 3601
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.
Signed R. J. Heard
Title Field Superintendent

Date May 23, 1957

The summary on this page is for the condition of the well at above date.

Commenced drilling April 17, 1957 Finished drilling May 19, 1957

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 1535 to 1592 (G) No. 4, from _____ to _____
No. 2, from 2350 to 2355 (G) No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from 2070 to 2080 No. 3, from _____ to _____
No. 2, from 2320 to 2325 No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>10 3/4</u>	<u>32.75</u>	<u>8rd</u>	<u>Lucas</u>	<u>478</u>	<u>Texas</u>				<u>Salt</u>
<u>8 5/8</u>	<u>21.02</u>	<u>8rd</u>	<u>Star</u>	<u>2381</u>	<u>Pattern</u>	<u>2380</u>			<u>String</u>
									<u>Water</u>
									<u>String</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>10 3/4</u>	<u>424</u>	<u>50</u>	<u>Pump & Plug</u>	<u>None</u>	<u>None</u>

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from 0 feet to 2858 feet, and from _____ feet to _____ feet

DATES

May 23, 1957 Plugged and Abandoned May 21, 1957

The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES


G. G. Barron, Driller Alfred Gooley, Driller
E. J. Botkin, Driller E. W. Hughes, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	10	10	Caliche
10	70	60	Sand
70	95	25	Red Shale
95	100	5	Gravel
100	210	110	Red Bed
210	245	35	Sand
245	270	25	Anhy and Red Shale
270	362	92	Anhy
362	415	53	Red Shale
415	420	5	Red and Blue Shale
420	440	20	Anhy
440	452	12	Red Shale
452	884	432	Salt
884	1115	231	Salt and Anhy
1115	1150	35	Red Shale and Anhy
1150	1156	6	Red Bed
1156	1170	14	Red Shale
1170	1180	10	Salt
1180	1255	75	Anhy
1255	1315	60	Broken Anhy
1315	1330	15	Red Shale
1330	1351	21	Anhy
1351	1400	49	Red Shale
1400	1495	95	Broken Anhydrite
1495	1580	85	Anhy and Shale

U. S. DEPARTMENT OF THE INTERIOR
BUREAU OF MINES
WASHINGTON, D. C.

REPORT OF THE
COMMISSIONER OF THE
BUREAU OF MINES
FOR THE YEAR 1904

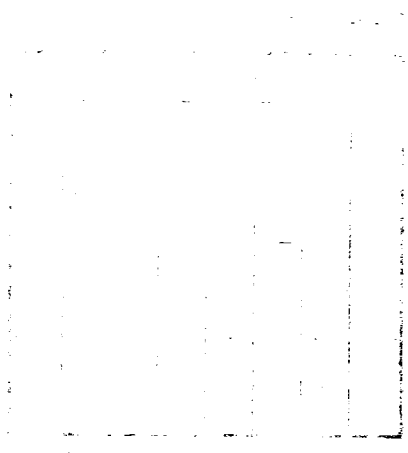

It is of the greatest importance to have a complete history of the well. Please state in detail the dates of redrilling, together with the reasons for the work and its results. If there were any changes made in the casing, state fully, and if any casing was "sidetracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

HISTORY OF OIL OR GAS WELL

16-43094-2 U. S. GOVERNMENT PRINTING OFFICE

1565	Any	5	1565	Any	5
1585	Sand and Lime	15	1600	Sand and Lime	15
1600	Any	255	1855	Any	255
1855	Shale and Any	20	1875	Shale and Any	20
1875	Shale	10	1885	Shale	10
1885	Shale and Salt	20	1905	Shale and Salt	20
1905	Any	165	2070	Any	165
2070	Red and Gray Sand	32	2102	Red and Gray Sand	32
2102	Any	183	2285	Any	183
2285	Sandy Shale	10	2295	Sandy Shale	10
2295	Sand	30	2325	Sand	30
2325	Red Shale	5	2330	Red Shale	5
2330	Any	20	2350	Any	20
2350	Sand	5	2355	Sand	5
2355	Any	17	2372	Any	17
2372	Shale	8	2380	Shale	8
2380	Any	20	2400	Any	20
2400	Any and Shale	175	2595	Any and Shale	175
2595	Any	70	2665	Any	70
2665	Broken Lime	100	2765	Broken Lime	100
2765	Lime and Sand	40	2814	Lime and Sand	40
2814	Any	9	2819	Any	9
2819	Lime and Sand	5	2833	Lime and Sand	5
2833	Red and Gray Sand	14	2845	Red and Gray Sand	14
2845	Lime	12	2850	Lime	12
2850	Lime and Shale	5	2862	Lime and Shale	5
2862	Lime	4	2856	Lime	4