FORM C-105

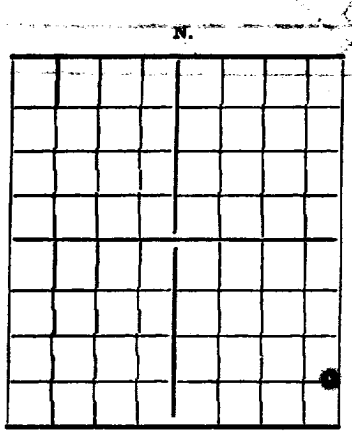

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

RECEIVED
JUL 1 - 1943
HOBBS OFFICE

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Barney Cockburn Company Artesia, New Mexico
Operator Address

Overton-State Well No. 9 in NW¼SE¼ of Sec. 36, T. 16
Lease

R. 30, N. M. P. M., Square Lake Field, Eddy County.

Well is 3300 feet south of the North line and 660 feet west of the East line of .

If State land the oil and gas lease is No. B-3006 Assignment No. 12

If patented land the owner is , Address

If Government land the permittee is , Address

The Lessee is Paul Overton, et al, Address Los Angeles, Calif.

Drilling commenced February 8 19 43. Drilling was completed June 9 19 43

Name of drilling contractor T. E. Brown, Address Artesia, New Mexico

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until 19 .

OIL SANDS OR ZONES

No. 1, from 2995' to 3000' (Gas) No. 4, from to

No. 2, from 3050' to 3060' (Oil) No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 400' to 410 feet.

No. 2, from 2415' to 2425 feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	PERFORATED TO	PURPOSE
8"	28	10	Used	510'	T.P.				
5½"	17	10	New	2835'	T.P.				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8"	510'	50	International		
6"	5½"	2835'	100	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
None						

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 3100 feet, and from feet to feet

PRODUCTION

Put to producing June 9, 19 43

The production of the first 24 hours was 100 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Perry Triplitt, Driller Bob Lattimer, Driller

E. H. Hester, Driller , Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Artesia, New Mexico June 22, 1943
Place Date

Subscribed and sworn to before me this 22nd day of June, 19 43

Juanita Dent Notary Public.

Name Barney Cockburn

Position Owner

Representing Barney Cockburn Company

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	160		Sand
160	310		Red Shale
310	330		Anhydrite
330	400		Red Shale
400	410		Water Sand
410	450		Red Shale
450	500		Anhydrite
500	510		Salt
510	1435		Salt
1435	1470		Anhydrite and salt
1470	2355		Anhydrite
2355	2415		Anhydrite and shale
2415	2445		Red Sand
2445	2815		Anhydrite
2815	2995		Lime
2995	3000		Sandy Lime
3000	3050		Lime
3050	3060		Sand
3060	3100		Lime
	3100		Total Depth