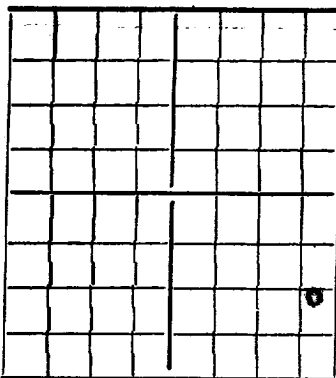


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Barney Cockburn Company

Artesia, New Mexico

Overton-State Company or Operator Well No. 9 in NE 1/4 Sec. 36, T. 16 S. R. 30 E, N. M. P. M., Square Lake Field, Eddy County.
Well is 3300 feet south of the North line and 660 feet west of the East line of B-3006
If State land the oil and gas lease is No. Assignment No. 12
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is Paul Overton, et al Address Los Angeles, Calif.
Drilling commenced February 8, 1943 Drilling was completed June 9, 1943
Name of drilling contractor T. E. Brown Address Artesia, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 2995' to 3000' (Gas) No. 4, from to
No. 2, from 3050' to 3060' (Oil) No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 400' to 410 feet.
No. 2, from 2415' to 2445 feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

| SIZE | WEIGHT PER FOOT | THREADS PER INCH | MAKE | AMOUNT | KIND OF SHOE | CUT & FILLED FROM | PERFORATED FROM TO | PURPOSE |
|--------|-----------------|------------------|------|--------|--------------|-------------------|--------------------|---------|
| 8" | 28 | 10 | Used | 510' | T.P. | | | |
| 5 1/2" | 17 | 10 | New | 2835' | T.P. | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

MUDDING AND CEMENTING RECORD

| SIZE OF HOLE | SIZE OF CASING | WHERE SET | NO. SACKS OF CEMENT | METHOD USED | MUD GRAVITY | AMOUNT OF MUD USED |
|--------------|----------------|-----------|---------------------|---------------|-------------|--------------------|
| 10" | 8 1/2" | 510' | 50 | International | | |
| 8" | 5 1/2" | 2835' | 100 | " | | |
| | | | | | | |
| | | | | | | |

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

| SIZE | SHELL USED | EXPLOSIVE OR CHEMICAL USED | QUANTITY | DATE | DEPTH SHOT OR TREATED | DEPTH CLEANED OUT |
|------|------------|----------------------------|----------|------|-----------------------|-------------------|
| None | | | | | | |
| | | | | | | |
| | | | | | | |

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 3100 feet, and from feet to feet

PRODUCTION

Put to producing June 9, 1943.
The production of the first 24 hours was 100 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Perry Triplitt, Driller Bob Lattimer, Driller
E. H. Hester, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Artesia, New Mexico June 22, 1943

Subscribed and sworn to before me this 22nd

day of June, 1943

Juanita Denton

Notary Public.

Name Barney Cockburn

Position Owner

Representing Barney Cockburn Company

FORMATION RECORD

| FROM | TO | THICKNESS IN FEET | FORMATION |
|----------------|-----------------|----------------------|------------------------|
| 0 | 160 | | Sand |
| 160 | 310 | | Red Shale |
| 310 | 330 | | Anhydrite |
| 330 | 400 | | Red Shale |
| 400 | 410 | | Water Sand |
| 410 | 450 | | Red Shale |
| 450 | 500 | | Anhydrite |
| 500 | 510 | | Salt |
| 510 | 1435 | | Salt |
| 1435 | 1470 | | Anhydrite and salt |
| 1470 | 2355 | | Anhydrite |
| 2355 | 2415 | | Anhydrite and shale |
| 2415 | 2445 | | Red Sand |
| 2445 | 2815 | | Anhydrite |
| 2815 | 2995 | | Lime |
| 2995 | 3000 | | Sandy Lime |
| 3000 | 3050 | | Lime |
| 3050 | 3060 | | Sand |
| 3060 | 3100 T.D. | | Lime |
| | 3100 | | Total Depth |