

(SUBMIT IN TRIPLICATE)

Land Office **Las Cruces**
Lease No. **LC 063064**
J

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APPROVED
SEP 27 1961
Sec. 40 BROWN
A. W. BROWN
ACTING DISTRICT ENGINEER

RECEIVED

SEP 28 1961

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 21, 1961, 19

Well No. **13** is located **1980** ft. from **N** line and **1980** ft. from **E** line of sec. **20**
NW/4 SE/4 Sec 20 **T.16S, R.31E** **106M**
(Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Square Lake **Edg.** **New Mexico**
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Well to be drilled with cable tools to T.D. of 3600' to test Grayburg-San Andres formations expected at 3380'. 10 3/4", 40# surface pipe-500' to be cemented w/ a minimum of 50 sks. 7", 23# water shut off string will be run and pulled as necessary.

4 1/2", 9.5# production string will be run and cemented from T.D. to 3600', or to a point 200' above the red sand. 5 1/2", 15# pipe will be run from 3600' to surface. Casing will be perforated and formation will be treated with 30,000 gal. oil & 60,000 lb. sand.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **Western Oil Fields, Inc.**

Address **Box 1147**

Hobbs, New Mexico

By **R. H. Smith**
Title **Petroleum Engineer**

SEP 26 1961

NEW MEXICO OIL CONSERVATION COMMISSION

WELL LOCATION AND ACREAGE DEDICATION PLAT

Form O-100
Revised 1/59

SEE INSTRUCTIONS FOR COMPLETING THIS FORM ON THE REVERSE SIDE

SECTION A


Operator Western Oil Fields, Inc.			Lease Grier		Well No. 12
U&L Loc. I	Section 20	Township 16 South	Range 31 East	County Hddy	
Actual Footage Location of Well: 1980 feet from the South line and 1980 feet from the East line					
Ground Level Elev.	Producing Formation Hayburg-San Andres		Pool Square Lake		Dedicated Acreage 40 Acres

1. Is the Operator the only owner in the dedicated acreage outlined on the plat below? YES ☒ NO ☐ ("Owner" means the person who has the right to drill into and to produce from any pool and to appropriate the production either for himself or for himself and another. (63-3-29 (a) NMSA 1935 Comp.)
2. If the answer to question one is "no," have the interests of all the owners been consolidated by communication in writing? YES ☐ NO ☐ . If answer is "yes," Type of Consolidation **RECEIVED**
3. If the answer to question two is "no," list all the owners and their respective interests below: **SEP 27 1961**

Owner	Land Description

U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO

SECTION B

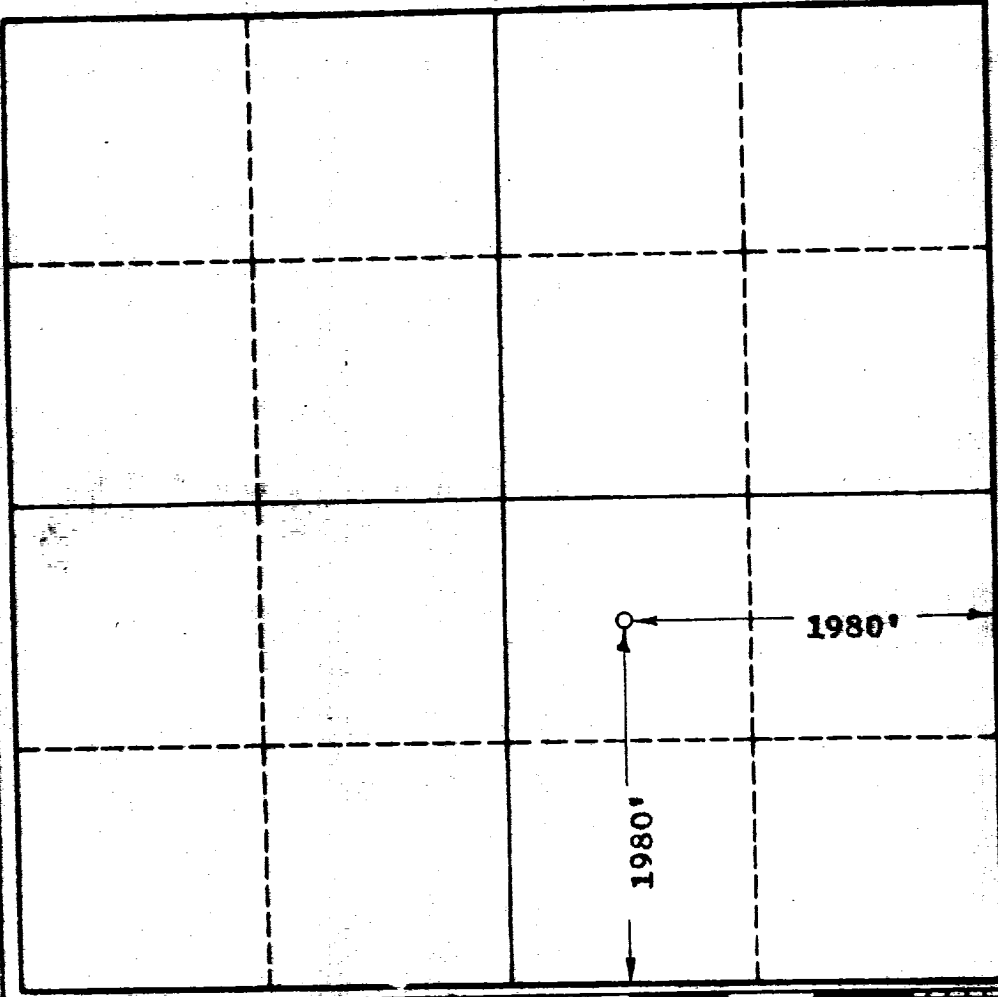

CERTIFICATION

I hereby certify that the information in SECTION A above is true and complete to the best of my knowledge and belief.

Name Paul White
Position Consultant
Company Western Oil Fields, Inc.
Date Sept. 25, 1961

I hereby certify that the well location shown on the plat in SECTION B was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.



0 330 660 990 1320 1650 1980 2310 2640 2970 3300 3630 3960 4290 4620 4950 5280 5610 5940 6270 6600