


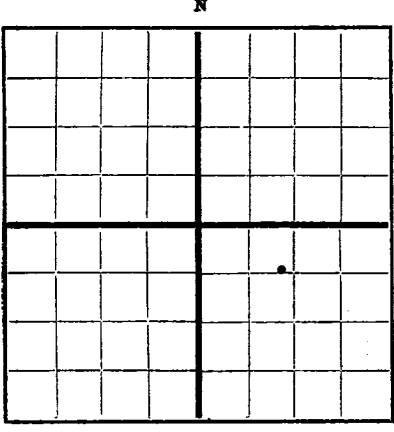

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

30-015-04973

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

G. B. Suppes
Company or Operator
Tulsa Oklahoma
Address
Well No. 15 B in NE-NW-SE of Sec. 33 T. 16S
R. 31E N. M. P. M. Square Lake Field, Eddy County.
Well is 2970 feet south of the North line and 1650 feet west of the East line of sec 33
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is S P Johnson Address Roswell N M
The Lessee is Address
Drilling commenced Sept 26 19 49 Drilling was completed Nov 7 19 49
Name of drilling contractor Company Tools Address
Elevation above sea level at top of casing 3973 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3600 to 3618 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet
No. 2, from to feet
No. 3, from to feet
No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8	28	8	used	705	Tex				
7"	24	10	Nat	3375	Tex				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
10	8 5/8	705	50	Plug & Pres		10 sacks aquagel
8	7"OD	3375				10 sacks aquagel

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5 1/2		Glycerin	130	11-27	3623	3635

Results of shooting or chemical treatment Increased from 5 barreil to 11 barreils per day after shot

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 3635 feet, and from feet to feet

PRODUCTION

Put to producing Dec 3 19 49
The production of the first 24 hours was 11 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be 35
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Max Stephens Driller Clyde Galloway Driller
E I Glover Driller Harvey Flynn Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 15 day of December 19 49
Notary Public
My Commission expires 4-24-52
Artesia New Mexico December 15-49
Name B E Kennedy
Position Drilling Supt.
Representing G B Suppes Company or Operator
Address Artesia New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	585	585	Red Rock
585	705	120	Anhydrite
705	1695	990	Salt
1695	2800	1205	Anhydrite
2800 2805	2805 3165	5	Red Sand
2805	3165	360	Anhydrite
3165	3225	60	Lime Gray
3225	3502	277	Lime
3502	3509	7	Lime Pink
3509	3518	9	Lime White
3518	3600	82	Lime White
3600	3618	18	Lime Sandy
3618	3635	17	Lime Gray