


ROSWELL OFFICE COPY

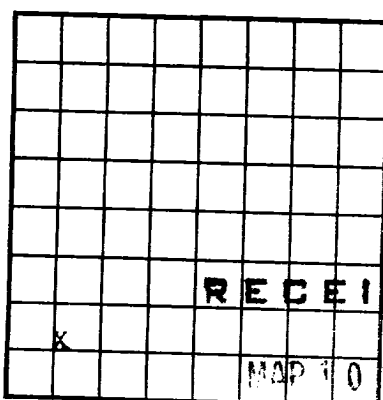

ILLEGIBLE

 U. S. LAND OFFICE Las Cruces
 SERIAL NUMBER 056302 B
 LEASE OR PERMIT TO PROSPECT None

 UNITED STATES
 DEPARTMENT OF THE INTERIOR
 GEOLOGICAL SURVEY

 RECEIVED
 DEC 3 1946
 ROSWELL, NEW MEXICO

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

 Company C. C. C. Oil Service Address Tulsa Okla
 Lessor or Tract Johnson Field Quare Lake State New Mex
 Well No. 10 B Sec. 34 T. 16 R. 31 Meridian N. 10. 10. N. County Gray
 Location 660 ft. (N.) of 2 Line and 660 ft. (E.) of 1 Line of Sec. 34 Elevation 3500
 (Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Date Nov 29 1946Signed B. E. Kennedy
Title Drilling Asst.

The summary on this page is for the condition of the well at above date.

Commenced drilling Sept. 20 1946, 19 Finished drilling Nov 11 1946, 19

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

 No. 1, from 3405 to 3411 No. 4, from _____ to _____
 No. 2, from 3535 to 3555 No. 5, from _____ to _____
 No. 3, from 3682 to 3690 No. 6, from _____ to _____

IMPORTANT WATER SANDS

 No. 1, from 2822 to 2834 No. 3, from _____ to _____
 No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8 1/2"	20	8	Tex	2886	Tex	2836			
5 1/2"	14	8	Tex	3555	Tex				

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 1/2"	745	50	Halliburton		10 sacks
7"	2886	10 gal seal	"		10 " gravel
5 1/2"	3395	100	"		10 " "

PLUGS AND ADAPTERS

 Heaving plug—Material _____ Length _____ Depth set _____
 Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
4"		lycorin	100	11-14	3682	3700

TOOLS USED

 Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
 Cable tools were used from _____ feet to 3703 feet, and from _____ feet to _____ feet

DATES

 _____, 19 Put to producing Nov 10 1946, 19
 The production for the first 24 hours was 90 barrels of fluid of which 100 % was oil; _____ %
 emulsion; _____ % water; and _____ % sediment. Gravity, °Bé. 37

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

 George Axis, Driller Phillips, Driller
 Fred Doughty, Driller Glover, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	600	600	red rock
600	730	130	Anhydrite
730	735	5	Red rock
735	750	15	Anhydrite
750	1750	1000	salt
1750	2822	1072	Anhydrite
2822	2845	27	Red sand
2845	3195	245	Anhydrite
3195	3225	30	Red rock
3225	3235	10	Anhydrite
3235	3405	170	Lime
3405	3411	6	sand
3411	3430	19	Lime
3430	3440	10	sand
3440	3535	95	Lime
3535	3555	20	sand
3555	3664	109	White Lime
3664	3680	16	sand
3680	3703	23	Lime

FORMATION RECORD—Continued

