

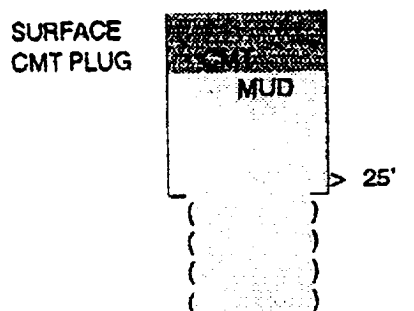
GP II ENERGY, INC.

P & A WELLBORE DIAGRAM

WELL: KENNEDY FEDERAL #1
 FIELD: SQUARE LAKE
 INTERVAL: GB-SA

LOCATION:
 1980' FNL & 660' FEL
 SEC 28, T-16-S, R-31-E
 EDDY COUNTY, NEW MEXICO

SURFACE
 CMT PLUG

SURFACE CASING:

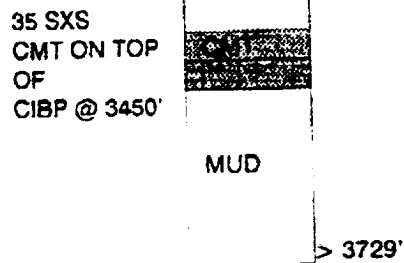
RAN 10 3/4" CSG, SET @ 25'
 CMT. W/ 50 SXS., TOC @ SURFACE (CALC.)

CMT PLUG
 144-244'

PRODUCTION CASING:

RAN 5 1/2" CSG, SET @ 3729'.
 CMT W/ 200 SXS, TOP OF CEMENT @ 2511' (CALC.)

35 SXS
 CMT ON TOP
 OF
 CIBP @ 3450'

PERFORATIONS

3474-3689'

PLUGS:

PLUG #1 - CIBP @ 3450'
 PLUG #2 - 35 SXS CMT ON TOP OF CIBP
 PLUG #3 - CMT PLUG @ 144-244'
 PLUG #4 - UNKNOWN SIZE CMT PLUG @ SURFACE

TD: 3729'
 PBTD: 3727'

GP II, Inc. 2090

01-Dec-98

NSLU#47