




13-3/8", 54#, H-40 @ 238'
w/250 sx cement

8-5/8", 24#, K-55 @ 1000'
w/765 sx cement

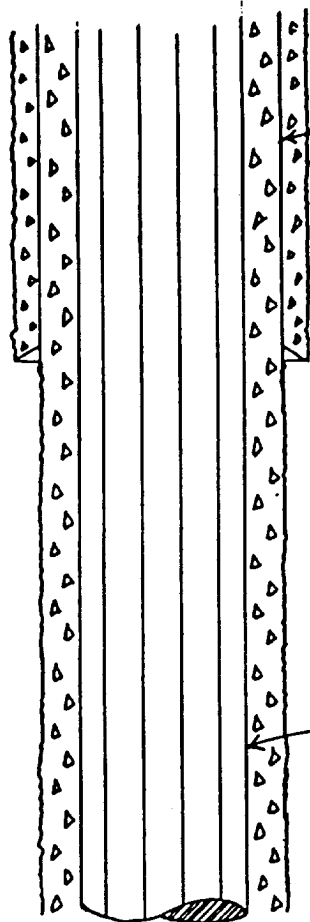

Approximate top of cement 4170'

Perforations
~~Upper-Wolfcamp~~ 4670-4716'
J.C.

(3/8 holes in 2 3/8 EUE (3 Holes)
@ 4700, 4685, + 4670
6-28-96)

2" EUE, 4.7#, J-55 tubing
set @ 7026'

DV Tool @ 5000'
Cemented upper stage through DV
Tool @ 5000' w/250 sx cement

Otis Sliding Sleeve
1 jt above packer @ 6994'

Approximate top of cement 6600'

4 1/2" Otis Retrievmatic
Packer @ 7026' w/On-Off
tool above packer
1.875 Profile

4 1/2", 10.5# & 11.6#, K-55 @ 7210'
w/200 sx cement
(2 3/8 Bridge Plug set (6-28-96))

Atoka perforations 7100-7116'

TOTAL DEPTH 7215'

Approved for production

SCHEMATIC DRAWING
BEARD OIL COMPANY
HANLAD #1