

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Oil Cons
N.M. DIV-L 1.2

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

C/SF


SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well Oil <input type="checkbox"/> Gas <input type="checkbox"/> Well <input type="checkbox"/> Well <input checked="" type="checkbox"/> Other <input type="checkbox"/>		5. Lease Designation and Serial No. NM - 11327
2. Name of Operator STRATA PRODUCTION COMPANY		6. If Indian, Allottee or Tribe Name
3. Address and Telephone No. P. O. Box 1030 Roswell, New Mexico 88202-1030		7. If Unit or CA, Agreement Designation 30-015-22-748
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 1980' FSL and 1980' FWL Section 14-16S-30E		8. Well Name and No. Norman Federal
		9. API Well No. #1
		10. Field and Pool, or Exploratory Area Henshaw Q-G-SA
		11. County or Parish, State Eddy



12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> Notice of Intent	<input checked="" type="checkbox"/> Abandonment	<input type="checkbox"/> Change of Plans
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion	<input type="checkbox"/> New Construction
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Other	<input type="checkbox"/> Dispose Water


13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Set CIBP @ 2200' with 35' cement. Circulate hole with 9# mud. Cut and pull casing at +/- 1900'. Spot 100' plug, 25 sx, half in and half out of casing stub. Spot 100' plug, 25 sx, 1324' - 1424'. Spot 100' plug, 25 sx, 350' - 450'. 50', spot 15 sx surface plug. Install dry hole marker. Clean location, rip and reseed.

(Attachment: ^{TAG} Plugging Procedure)

RELEASED FOR
CONDITIONS OF APPROVAL

Accepted for record - NMOCD

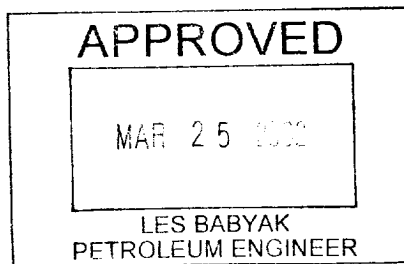

14. I hereby certify that the foregoing is true and correct

Signed <u>Kelly M. Britt</u>	Title <u>Production Records</u>	Date <u>March 14, 2002</u>
(This space for Federal or State office use)		
Approved by _____	Title _____	Date _____
Conditions of approval, if any:		

EXISTING

T. SALT 450'

T. YATES 1424'
7-RVRS 1592'

T. QUEEN 2232'


T. PENROSE 2501'

METEX 2756'

PREMIER 2926'

T. SAN ANDRES 2952'
LOVINGTON 3056'

SLAUGHTER 3664'

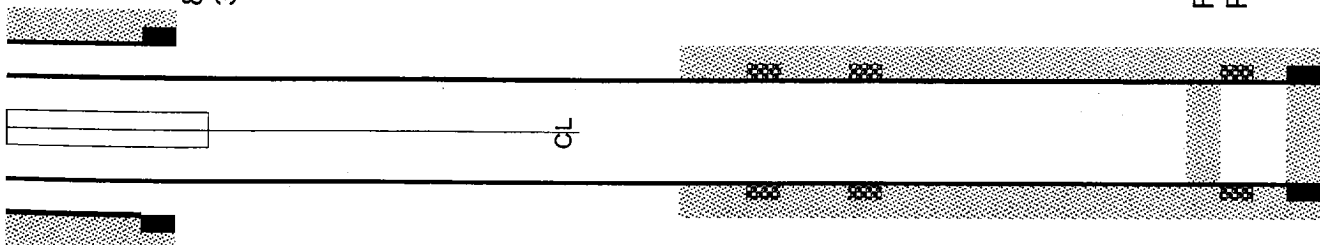

PROPOSED

NORMAN FEDERAL #1
1980' FSL & 1980' FWL
SEC. 14-T16S-R30E
EDDY COUNTY, NM
API # 30-015-22748
SPUD DATE: 12/20/78

8 5/8" CASING @ 443'
300 SX - CIRC. 10 SX.

20 JTS. 2 3/8" TUBING
50', 15 SX. SURFACE PLUG
100', 25 SX., 350'-450'

100', 25 SX., 1324'-1424'

CUT AND PULL CASING @ +/- 1900'
100', 25 SX. 1/2 IN & 1/2 OUT OF STUB

CIBP @ 2200' W/ 35' CEMENT

TOC +/-2080'

PERF. 2222-50'

PERF. 2504-16'

INSTALL DRY HOLE MARKER
CLEAN LOCATION, RIP AND RESEED

PBTD 3585' 3620' CIBP W/ 35' CEMENT
PERF. 3640'-46', 3671'-73', 3688-90'

4 1/2" CASING @ 3824'
400 SX. "H"

4 1/2" X 7 5/8" = .2278 CU. FT. / FT.
600SX + 25% EXCESS=1740' FILL