

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPL. COPY
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

Mesa Petroleum Co.

3. ADDRESS OF OPERATOR

1000 Vaughn Bldg. / Midland, TX 79701

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

2160' FNL & 1980' FWL, Lot 11

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3635' GR 3652' RKB

5. LEASE DESIGNATION AND SERIAL NO.

NM-33277

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Derrick Federal Com

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Diamond Mound
Unders. Atoka-Morrow

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec 5, T16S, R28E

12. COUNTY OR PARISH

13. STATE

Eddy

New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other) Bring cmt up to intermediate csg.

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL


ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Propose to run casing inspection log from 1000' below cement top to 8-5/8" casing.
If log indicates corrosion across uncemented pipe, circulate cement up to intermediate casing. Drill out cement. Circulate hole w/2% KCL water treated with corrosion inhibitor.

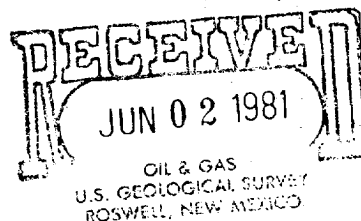

18. I hereby certify that the foregoing is true and correct

SIGNED

Cathy Wilkerson

TITLE Production Records Analyst

DATE 5/28/81

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

XC: USGS(6), TLS, MEC, LAND, PARTNERS, CNT RCDS, ACCTG, FILE

TITLE

DATE

JUN 2 1981

JAMES A. GILLHAM
DISTRICT SUPERVISOR

*See Instructions on Reverse Side