

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM 9987

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME RECEIVED
Exxon Federal

9. WELL NO.

#2 NOV 17 1981

10. FIELD AND POOL, OR WILDCAT

Wildcat O.C.D.

11. SEC., T., R., M., OR BLM, OFFICE
SURVEY OR AREA

Sec30 Twn16S Rge29E

12. COUNTY OR PARISH 13. STATE

Eddy

N.M.

C/SF
SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL ☐ WELL GAS ☐ WELL OTHER ☒ Plug & Abandon

2. NAME OF OPERATOR

MoroilCo, Inc.

3. ADDRESS OF OPERATOR

P.O. Drawer I, Artesia, N.M. 88210

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface

1980 from South line 1980 from East line

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3664.3'GR

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

(Other) ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

ABANDON* ☒

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) ☐

REPAIRING WELL ☐

ALTERING CASING ☐

ABANDONMENT* ☐

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any
proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones perti-
nent to this work.)*

Drilled to TD 3520'. Purpose to Plug & Abandon well.

Bridge plug set @ 2450' with 35' of cement.

Bridge plug set @ 2350' with 35' of cement.

Will set 100' cement plug @ 1890'-1790'


100' cement plug @ 1150'-1050'

min. 15 sx. plug @ 340'-240'

15 sx. plug @ 30' to surface.

Plug mud of 25sx. 100bb1. of water.

Will close bit. rim pad and road and make clean up.

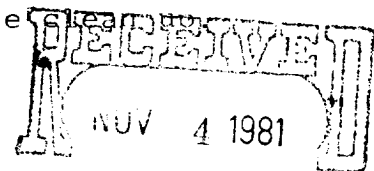

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

Roger A. Chapman
APPROVED

TITLE

Operator

DATE

10-30-81

(This space for Federal or State office use)

(Orig. Sgd.) ROGER A. CHAPMAN

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL NOV 12 1981

FOR

JAMES A. GILLHAM
DISTRICT SUPERVISOR

* SUBJECT TO THE ATTACHED CONDITIONS,

*See Instructions on Reverse Side



United States Department of the Interior

GEOLOGICAL SURVEY
South Central Region
Roswell District
P.O. Drawer 1857
Roswell, New Mexico 88202-1857

TELEPHONES:

Roswell Office: (505) 622-1332
Artesia Sub-District: (505) 746-9838
Hobbs Sub-District: (505) 393-3612

Re: Permanent Abandonment

Well: NO. 2 EXXON FEDERAL

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal Leases".
2. The ARTESIA Sub-District office is to be notified in sufficient time for a representative to witness all plugging operations.
3. Blowout prevention equipment is required.
4. In addition to normal filling of pits and cleanup of location, additional surface restoration work may be required, i.e. ripping of pad and/or access road, reseeding, etc. We have asked the Bureau of Land Management for the surface restoration requirements for this well and we should be able to furnish you these requirements within 30 days. After plugging the well and before making final clean-up, you should contact this office unless you have already been advised as to what additional surface restoration work is required.
5. THE 100' CEMENT PLUG FROM 340'-240' WILL HAVE TO BE SET INSIDE AND OUTSIDE OF 4½" CASING SINCE THERE IS NO RECORD OF WHERE THE TOP OF THE CEMENT IS ON THE BACKSIDE OF THE 4½" CASING.