

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on reverse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-30395

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Callaway Federal

9. WELL NO.

2

10. FIELD AND TOOL, OR WILDCAT

Undes Diamond

Mound Atoka

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec 6-16S-28E

12. COUNTY OR PARISH

Eddy

13. STATE

NM

SUNDRY NOTICES AND REPORTS ON WELLS
(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

Gulf Oil Corporation

3. ADDRESS OF OPERATOR

P. O. Box 670, Hobbs, NM 88240

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

2525' FNL & 1980' FEL

14. PERMIT NO.

15. ELEVATIONS (Show whether DN, RT, OR, etc.)

3592' GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETION

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREATMENT

ALTERING CASING

SHOOTING OR ACIDIZING




ABANDONMENT*

(Other) Casing

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Complete logs at 2 A.M., 12-25-80. RU & ran 52 & 1 cut joint 5½" 17# K-55 LT&C (2311') & 159 joints 5½" 15.5# K-55 LT&C (6773') (9084') set at 9100'. Cement with 500 sacks Halco Lite and 425 sacks "C" w/1.5% Halad 9 & 0.2% CFR-2. Plug down 3:30 A.M., 12-26-80. WOC 18 hours. TSITOC 5190'. Test casing to 3000# for 15 min, ok.

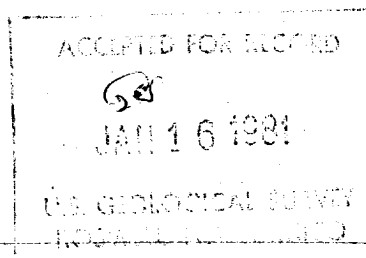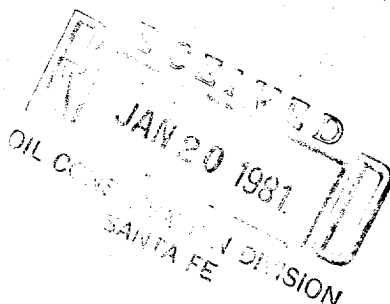

18. I hereby certify that the foregoing is true and correct

SIGNED

R. L. Vaughn

TITLE Area Drilling Superintendent DATE 1-14-81

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE