

Form 9-331
Dec. 1973

Form Approved.
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐
2. NAME OF OPERATOR
Eagle Oil & Gas Co.
3. ADDRESS OF OPERATOR
3000 N. Garfield, Suite 210, Midland, Texas
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1980/S 660/E
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


REQUEST FOR APPROVAL TO:	TEST WATER SHUT-OFF	FRACTURE TREAT	SHOOT OR ACIDIZE	REPAIR WELL	PULL OR ALTER CASING	MULTIPLE COMPLETE	CHANGE ZONES	ABANDON*	(other)
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

5. LEASE
Crow Flats "A" Federal Comm. Unit
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
Crow Flats "A" Federal Comm. Unit
8. FARM OR LEASE NAME
9. WELL NO.
1
10. FIELD OR WILDCAT NAME
Undesignated
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 19, T16S, R28E
12. COUNTY OR PARISH
Eddy
13. STATE
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
3590' FL; 3605' KDB

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

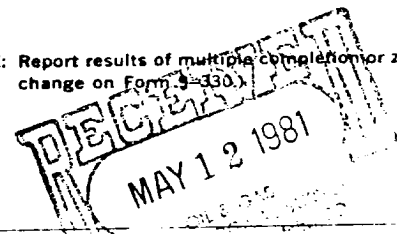

REQUEST APPROVAL TO: Change Zones

Test additional uphole zones by temporarily isolating the Morrow Sand perforations at 9247-53' and 9259-65'. If uphole zones are non-productive, well will be recompleted in the Morrow Sand perforations and placed on production.

Set temporary bridge plug at 7500'±. Perforate 6650'± and squeeze cement with 180 sacks Class "C" 50/50 Pozmix. (Cement top from original cementing job 7440' as per cement bond log.) Perforate 6467-77'. Acidize with 2,000 gals 15% HCl. Test and evaluate results. If non-productive, squeeze off tested interval and recomplete back to the Morrow Sand perforations at 9247-53' and 9259-65', install necessary surface production equipment and place on production.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Darrell S. Lohoefer TITLE Pet. Engineer DATE April 29, 1981

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

APPROVED
(ORIG. SGD.) KAREN E. SAYLES

MAY 15 1981

JAMES A. GILLHAM
DISTRICT SUPERVISOR