

NO. OF COPIES RECEIVED	5
DISTRIBUTION	
SANTA FE	1
FILE	1
U.S.G.S.	1
LAND OFFICE	
OPERATOR	1

NEW MEXICO OIL CONSERVATION COMMISSION

JAN 27 1981

O. C. D.
ARTESIA, OFFICE

30-015-23634

Form C-101
Revised 1-4-65

5A. Indicate Type of Lease
STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
5. State Oil & Gas Lease No.

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. Type of Work	DRILL <input checked="" type="checkbox"/>	DEEPEN <input type="checkbox"/>	PLUG BACK <input type="checkbox"/>
b. Type of Well	OIL WELL <input checked="" type="checkbox"/>	GAS WELL <input type="checkbox"/>	OTHER <input type="checkbox"/>
2. Name of Operator	Yates Petroleum Corporation		
3. Address of Operator	207 S. 4th St., Artesia, NM 88210		
4. Location of Well	UNIT LETTER K LOCATED 1650 FEET FROM THE South LINE		
AND 1650 FEET FROM THE West LINE OF SEC. 22 TWP. 17S RGE. 25E NMPM			

7. Unit Agreement Name
8. Farm or Lease Name
Jackson Estate By
9. Well No.
14
10. Field and Pool, or Wildcat
Eagle Creek S.A.

12. County	Eddy
19. Proposed Depth	Approx. 1500
19A. Formation	San Andres
20. Rotary or C.T.	Rotary
21. Elevations (Show whether DF, RT, etc.)	3540
21A. Kind & Status Plug. Bond	Blanket
21B. Drilling Contractor	L & M Drilling Co.
22. Approx. Date Work will start	As soon as approved

12. County	Eddy
19. Proposed Depth	Approx. 1500
19A. Formation	San Andres
20. Rotary or C.T.	Rotary
21. Elevations (Show whether DF, RT, etc.)	3540
21A. Kind & Status Plug. Bond	Blanket
21B. Drilling Contractor	L & M Drilling Co.
22. Approx. Date Work will start	As soon as approved

23. PROPOSED CASING AND CEMENT PROGRAM					
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
15"	10 3/4"	32#	Approx. 320'	350 sx.	Circulate
9 1/2"	7"	20#	Approx. 1150'	850 sx.	Circulate
6 1/4"	4 1/2" & 5 1/2"	10.5 & 15.5#	TD		Circulate

23. PROPOSED CASING AND CEMENT PROGRAM					
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
15"	10 3/4"	32#	Approx. 320'	350 sx.	Circulate
9 1/2"	7"	20#	Approx. 1150'	850 sx.	Circulate
6 1/4"	4 1/2" & 5 1/2"	10.5 & 15.5#	TD		Circulate

23. PROPOSED CASING AND CEMENT PROGRAM					
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
15"	10 3/4"	32#	Approx. 320'	350 sx.	Circulate
9 1/2"	7"	20#	Approx. 1150'	850 sx.	Circulate
6 1/4"	4 1/2" & 5 1/2"	10.5 & 15.5#	TD		Circulate

23. PROPOSED CASING AND CEMENT PROGRAM					
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
15"	10 3/4"	32#	Approx. 320'	350 sx.	Circulate
9 1/2"	7"	20#	Approx. 1150'	850 sx.	Circulate
6 1/4"	4 1/2" & 5 1/2"	10.5 & 15.5#	TD		Circulate

23. PROPOSED CASING AND CEMENT PROGRAM					
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
15"	10 3/4"	32#	Approx. 320'	350 sx.	Circulate
9 1/2"	7"	20#	Approx. 1150'	850 sx.	Circulate
6 1/4"	4 1/2" & 5 1/2"	10.5 & 15.5#	TD		Circulate

23. PROPOSED CASING AND CEMENT PROGRAM					
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
15"	10 3/4"	32#	Approx. 320'	350 sx.	Circulate
9 1/2"	7"	20#	Approx. 1150'	850 sx.	Circulate
6 1/4"	4 1/2" & 5 1/2"	10.5 & 15.5#	TD		Circulate

Propose to drill a San Andres test. Approximately 320' of 10 3/4" casing will be run if needed, and cemented to the surface to shut off surface gravel and cavings, 7" casing will be run 100' below the Artesian Zone, cemented to surface. A tapered string of production casing will be run and cemented, perforated and San frac'd for completion.

MUD PROGRAM: Fresh water mud w/LCM from surface to 1150', fresh water to total depth

BOP PROGRAM: BOP's to be installed on 7" casing and tested daily.

APPROVAL VALID FOR 180 DAYS
PERMIT EXPIRES 7-29-81
UNLESS DRILLING UNDERWAY

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

Signed Glenn K. King Title Geographer Date 1-24-81

(This space for State Use)

APPROVED BY W. A. Gressett TITLE SUPERVISOR, DISTRICT II DATE JAN 29 1981

CONDITIONS OF APPROVAL, IF ANY:

Cement must be circulated to surface behind all casing

Notify N.M.O.C.C. in sufficient time to witness cementing the 7" casing

NE EXICO OIL CONSERVATION COMMISSIC
WELL LOCATION AND ACREAGE DEDICATION PLAT

Form C-102
Supersedes C-120
Effective 1-1-80

All distances must be from the outer boundaries of the Section.


Operator Yates Petroleum Corporation			Lease Jackson Estate BY		Well No. 14
Unit Letter K	Section 22	Township 17 South	Range 25 East	County Eddy	
Actual Footage Location of Well: 1650 feet from the South line and 1650 feet from the West line					
Ground Level Elev. 3540	Producing Formation San Andres		Pool Eagle Creek S.A.	Dedicated Acreage: 40 Acres	

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

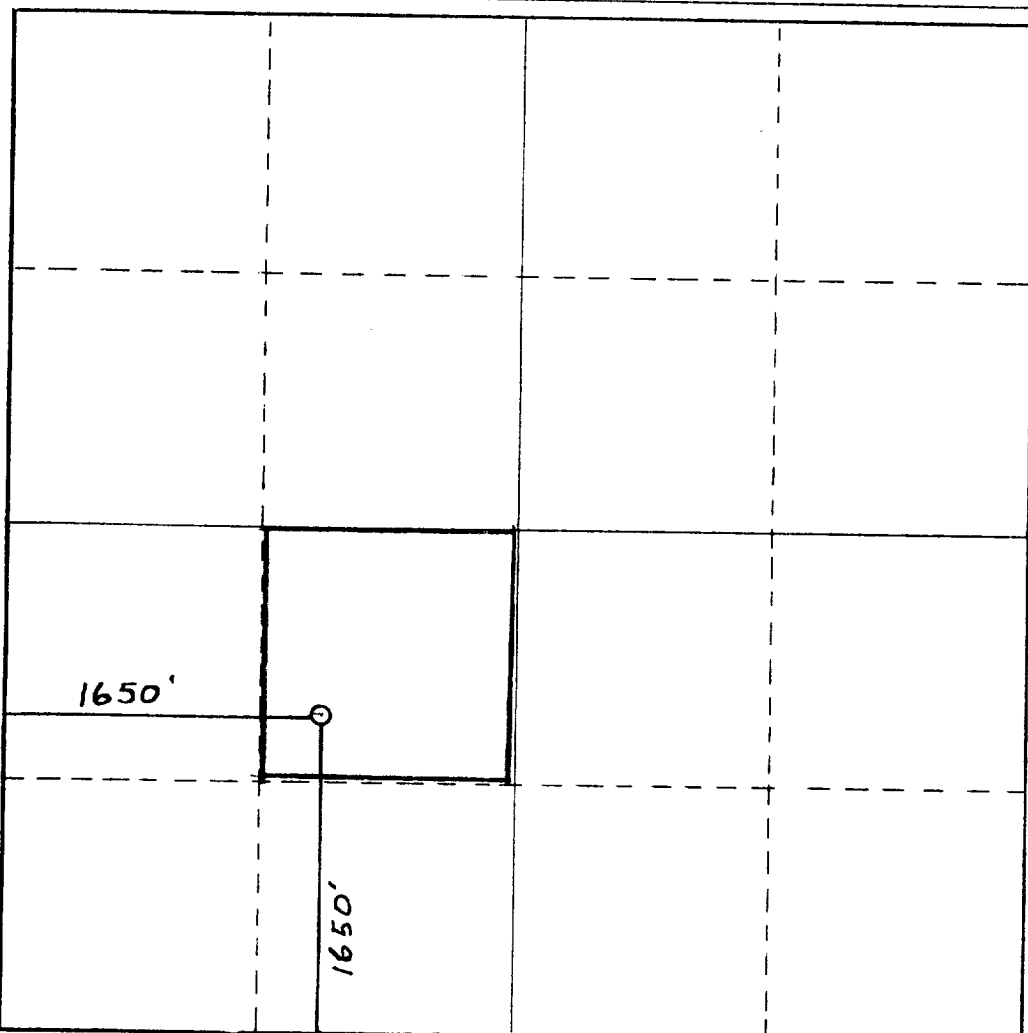

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.


Gliserio Rodriguez
Name

GLISERIO RODRIGUEZ
Position

GEOGRAPHER

Company
YATES PETROLEUM CORP.

Date
1-26-81

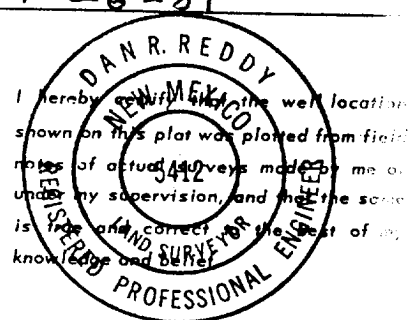


I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.


Date Surveyed
1-26-81

Registered Professional Engineer and/or Land Surveyor

Dan R. Reddy
Certificate No.

PEELS 5412



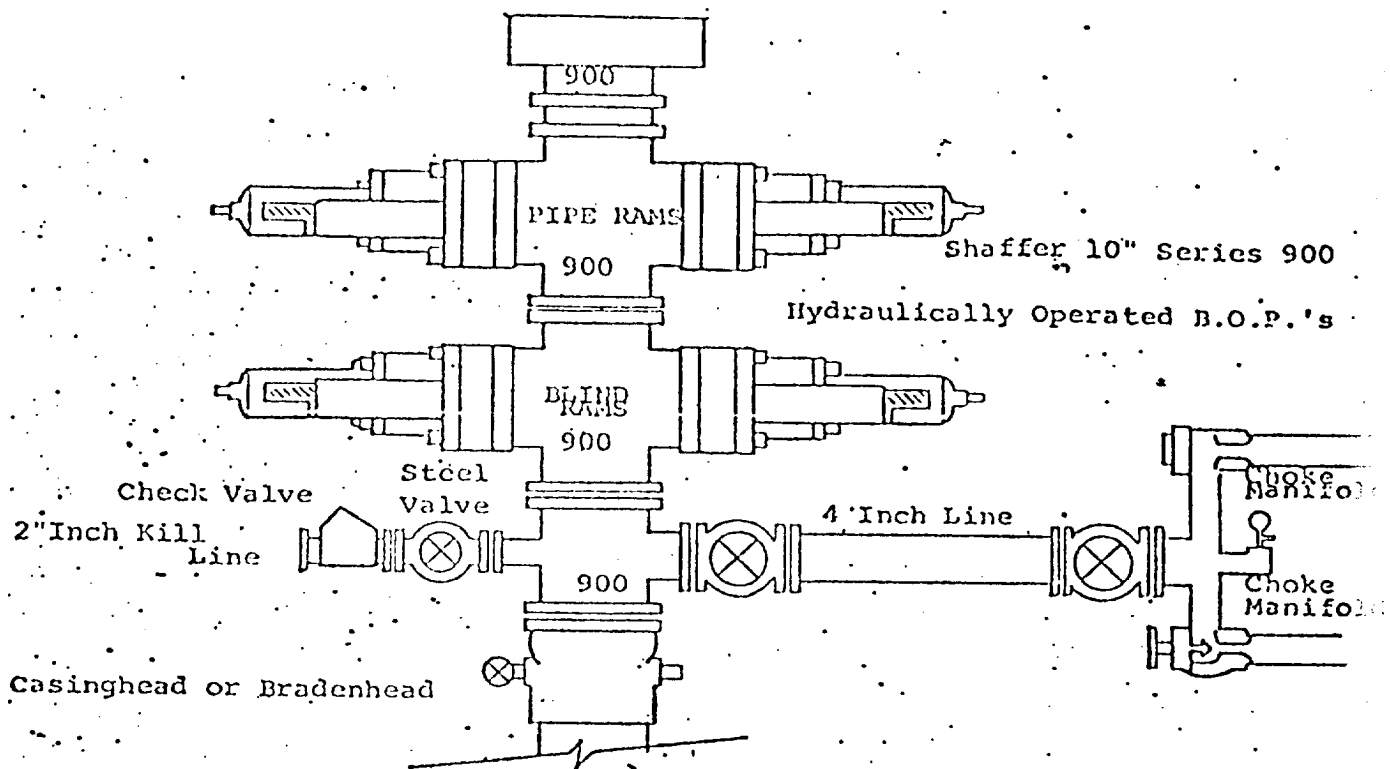

THE FOLLOWING CONSTITUTE MINIMUM BLOWOUT PREVENTER REQUIREMENTS

1. All preventers to be hydraulically operated with secondary manual controls installed prior to drilling out from under casing.
2. Choke outlet to be a minimum of 4" diameter.
3. Kill line to be of all steel construction of 2" minimum diameter.
4. All connections from operating manifolds to preventers to be all steel. hole or tube a minimum of one inch in diameter.
5. The available closing pressure shall be at least 15% in excess of that required with sufficient volume to operate the B.O.P.'s.
6. All connections to and from preventer to have a pressure rating equivalent to that of the B.O.P.'s.
7. Inside blowout preventer to be available on rig floor.
8. Operating controls located a safe distance from the rig floor.
9. Hole must be kept filled on trips below intermediate casing. Operator not responsible for blowouts resulting from not keeping hole full.
10. D. P. float must be installed and used below zone of first gas intrusion.