

N.M.O.C.D. COPY

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☐ other P&A ☒  
well well
2. NAME OF OPERATOR  
Yates Petroleum Corporation
3. ADDRESS OF OPERATOR  
207 South 4th St., Artesia, NM 88210
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 2310' FSL & 330' FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☒  
(other)

SUBSEQUENT REPORT OF:

- ☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

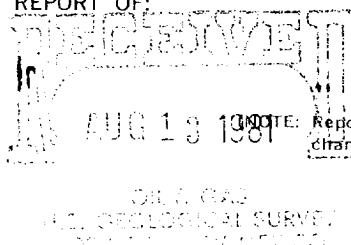

5. LEASE  
NM-13417
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME  
Strange "PZ" Federal
9. WELL NO.  
1
10. FIELD OR WILDCAT NAME  
Und. Henshaw Qn-Grbg-SA
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Unit I, Sec. 11-T16S-R30E
12. COUNTY OR PARISH  
Eddy
13. STATE  
NM
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
3880.6' GR

RECEIVED

AUG 18 1981

O. C. D.  
ARTESIA, OFFICE

NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Propose to plug and abandon this well as follows:

- Spot Class "C" cement plug from 3220' to 2520' (approximatley 50 sacks).
- Cut and pull 4-1/2" casing from approximately 1400'.
- Spot 100 sacks Class "C" plug across 4-1/2" casing stub from approximately 100' below stub.
- Set CIBP in 10-3/4" surface casing @475' and cap w/35 sacks Class "C" cement (approximately 85').
- Set 15 sacks cement plug at surface and install regulation abandonment marker.

Surface will be restored in accordance with USGA-BLM requirements  
Verbal approval for this plugging given by Mr. George Stewart, USGS, Roswell  
8-10-81.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED _____	TITLE Engineering Secty	DATE 8-11-81
<b>APPROVED</b> (Orig. Sgd.) ROGER A. CHAPMAN (This space for Federal or State office use)		
APPROVED BY _____	TITLE _____	DATE _____
<b>AUG 17 1981</b> JAMES A. GILLHAM DISTRICT SUPERVISOR		

\*See Instructions on Reverse Side