

N.M.O.C.D. COPY

Form 9-331
Dec. 1973Form Approved.
Budget Bureau No. 42-R1424UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☐ other ☐ P&A2. NAME OF OPERATOR
Yates Petroleum Corporation3. ADDRESS OF OPERATOR
207 South 4th St., Artesia, NM 882104. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 330' FNL & 1650' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☒

5. LEASE

NM-28007

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Sivley "PY" Federal

9. WELL NO. 1

10. FIELD OR WILDCAT NAME

Und. West Henshaw Unit

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Unit C, Sec. 9-T16S-R30E12. COUNTY OR PARISH Eddy
13. STATE NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3825.5' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

TD 3200'. Plugged & abandoned well as approved by USGS as follows: Circulated hole with mud. Spotted cement plug at 3000-2850' w/10 sacks Class "C" Neat. Set cement retainer at 2770'. Squeezed Premier w/50 sacks Class "C" cement - 800 psi squeeze. Spotted cement plug from 2770-2600' w/14 sacks Class "C" Neat; 2407-2250' w/10 sacks Class "C" Neat; 1250-1100' w/7 sacks Class "C" Neat; 575-350' w/15 sacks Class "C" Neat & a 15 sack Class "C" Neat plug at surface. Installed regulation abandonment marker. Surface will be restored in accordance with USGS-BLM requirements.

Subsurface Safety Valve: Manu. and Type

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

Set @

Ft.

18. I hereby certify that the foregoing is true and correct


SIGNED _____ TITLE Engineering Secty DATE 7-14-81

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

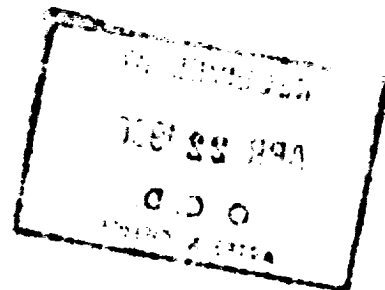

RECEIVED
APR 21 1986
C.C.D.
HOBBS OFFICE