

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

UNRECORDED COPY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☒ gas well ☐ other ☐

2. NAME OF OPERATOR
Yates Petroleum Corporation

3. ADDRESS OF OPERATOR
207 So. 4th - Artesia, NM 88210

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 990' FNL & 330' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

PULL OR ALTER CASING

MULTIPLE COMPLETE

CHANGE ZONES

ABANDON*

(other) Spud

5. LEASE

NM 036191

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

AUG 11 1981

8. FARM OR LEASE NAME

Federales "BO"

9. WELL NO.

8

10. FIELD OR WILDCAT NAME

Eagle Creek San Andres

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Unit D, NMPM
Sec. 23-17S-25E

12. COUNTY OR PARISH

Eddy


13. STATE

NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3513' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

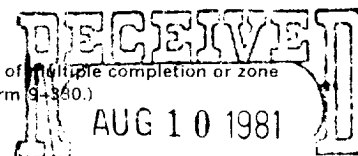

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded a 15" hole at 1:15 PM 7-31-81.

TD 350'. Ran 9 joints of 10-3/4" 32.30# ST&C (352') of casing set at 350'. 1-notched guide shoe at 350'. Flapper insert float at 308'. Cemented w/270 sacks Class "C" 2% CaCl. Compressive strength of cement - 1250 psi in 12 hours. PD 11:15 PM 7-31-81. Bumped plug to 750 psi, released pressure and float held okay. Cement circulated 40 sacks to pit. WOC. Drilled out at 11:15 AM 8-1-81. WOC 12 hours. Cut off and welded on flow nipple. Reduced hole to 9-7/8". Drilled plug and resumed drilling.

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Roger A. Chapman TITLE Engineering Sect'y DATE 8-6-81

ACCEPTED FOR RECORD
ROGER A. CHAPMAN

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

AUG 11 1981

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side