

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

## SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☒ well gas ☐ well other ☐
2. NAME OF OPERATOR  
Yates Petroleum Corporation ✓
3. ADDRESS OF OPERATOR  
207 South 4th St., Artesia, NM 88210
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 330 FSL & 990 FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

## REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

## SUBSEQUENT REPORT OF:

- ☒  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

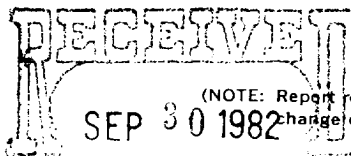

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

OIL & GAS  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Spudded a 14-3/4" hole at 11:30 AM 9-23-82. Set 40' of 20" conductor pipe. Ran 8 jts of 10-3/4" 32.75# & 40.5# H-40 ST&C casing as follows: 4 jts of 10-3/4" 32.75# H-40 ST&C & 4 jts of 10-3/4" 40.5# J-55 casing set at 330'. 1-Texas Pattern guide shoe set at 330'. Insert float set at 286'. Cemented w/225 sacks Class "C" w/3% CaCl<sub>2</sub>. Compressive strength of cement - 1275 psi in 12 hrs. PD 6:00 PM 9-23-82. Bumped plug to 1000 psi, released pressure and float held okay. Cement circulated 15 sacks. WOC. Drilled out 6:00 AM 9-24-82. WOC 12 hrs. Cut off and welded on flow nipple. Reduced hole to 9-7/8". Drilled plug and resumed drilling. Ran 30 jts of 7" 20# J-55 ST&C casing set at 1095'. 1-Texas Pattern notched guide shoe at 1095'. Type M insert float at 1062'. Cemented w/200 sacks Halliburton Lite, 10#/sack gilsonite, 1/4#/sack flocele and 3% CaCl<sub>2</sub>. Compressive strength of cement - 1250 psi in 12 hrs. PD 10:45 PM 9-24-82. Bumped plug to 1000 psi, released pressure and float held okay. Cement circulated 25 sacks. WOC. Drilled out 4:45 PM 9-25-82. WOC 18 hrs. NU and tested to 1000 psi okay. Reduced hole to 6-1/4". Drilled plug and resumed drilling.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Engineering Secty DATE 9-29-82

ACCEPTED FOR RECORD

(This space for Federal or State office use)

APPROVED BY [Signature] TITLE \_\_\_\_\_ DATE \_\_\_\_\_CONDITIONS OF APPROVAL IF ANY OCT 1 1982U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

See Instructions on Reverse Side

5. LEASE  
NM 0219603
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME **RECEIVED**
8. FARM OR LEASE NAME **OCT 7 1982**  
Federal BZ
9. WELL NO. **O. C. D.**  
17 **ARTESIA OFFICE**
10. FIELD OR WILDCAT NAME  
Eagle Creek SA
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Unit P, Sec. 21-T17S-R25E
12. COUNTY OR PARISH **Eddy** 13. STATE **NM**
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
3554' GR