


NEW MEXICO OIL CONSERVATION COMMISSION  
DRAWER DD  
ARTESIA, NEW MEXICO

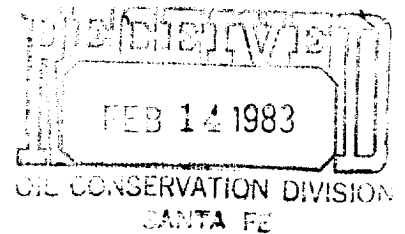

FIELD REPORT FOR CEMENTING OF WELLS

Operator <u>Yates Petr. Corp.</u>		Lease <u>Gissler AV</u>		Well # <u>33</u>	
Location of Well	Unit <u>B</u>	Section <u>23</u>	Township <u>17</u>	Range <u>25</u>	County <u>Eddy</u>
Drilling Contractor	<u>L + M #2</u>		Type of Equipment <u>Rotary</u>		

\* Witness

APPROVED CASING PROGRAM

Size of Hole	Size of Casing	Weight Per Foot	New or Used	Depth	Sacks Cement
<u>14 1/2</u>	<u>10 3/4</u>	<u>32 #</u>		<u>350</u>	<u>200 Circ.</u>
* <u>9 1/2</u>	<u>7</u>	<u>30 #</u>		<u>1150</u>	<u>700 Circ.</u>
<u>6 1/4</u>	<u>4 1/2</u>	<u>10.5 #</u>		<u>1500</u>	<u>150 Circ.</u>

Casing Data:

Surface \_\_\_\_\_ joints of \_\_\_\_\_ inch \_\_\_\_\_ # Grade \_\_\_\_\_  
(Approved) (Rejected)

Inspected by \_\_\_\_\_ date \_\_\_\_\_

Cementing Program

Size of hole 9 1/2 Size of Casing 7 Sacks cement required \_\_\_\_\_

Type of Shoe used Tex-Pat Float collar used Insert Btm 3 jts welded Yes

TD of hole 1148 Set 1150 Feet of 7 Inch 23 # Grade J-55

New ~~rod~~ csg. @ 1150 with 150 sacks neat cement around shoe

+ 300 sax Hawco Lite additives 1/4 Flo Seal #10 Gilsomite 2% CC

Plug down @ 345 (AM) (PM) Date 2-10-83

Cement circulated Yes No. of Sacks 25

Cemented by Hawco Witnessed by BW Weaver

Temp. Survey ran @ \_\_\_\_\_ (AM) (PM) Date \_\_\_\_\_ top cement @ \_\_\_\_\_

Casing test @ \_\_\_\_\_ (AM) (PM) Date \_\_\_\_\_

Method Used \_\_\_\_\_ Witnessed by \_\_\_\_\_

Checked for shut off @ \_\_\_\_\_ (AM) (PM) Date \_\_\_\_\_

Method used \_\_\_\_\_ Witnessed by \_\_\_\_\_

Remarks: Loss Circulation 748 Ft