

Drawer DD

UNITED STATES Artesia, NM 88210

DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

RECEIVED BY

JUL 3 1985

O. C. D.  
ARTESIA OFFICE

## NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐2. NAME OF OPERATOR  
Beach Exploration, Inc. ✓3. ADDRESS OF OPERATOR  
800 N. Marienfeld Suite 200 Midland, Texas

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 660' FEL &amp; FSL of Section

AT TOP PROD. INTERVAL: Same

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐☐  
☒  
☒  
☐  
☐  
☐  
☐  
☐

5. LEASE

~~Exxon Federal~~

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

NM 26072

8. FARM OR LEASE NAME

Exxon Federal

9. WELL NO.

1

10. FIELD OR WILDCAT NAME

High Lonesome

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 18, T16S, R29E

12. COUNTY OR PARISH

Eddy

13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

5-14-85 Perfed, acidized with 950 Gals. 15% NeFe Acid and ball sealers.

5-15-85 Fraced with 20,000 Gals Gelled Water, 17000# 20/40 Sand, and 10,000# 12/20 Sand.

5-16-85 Pulled tbg. to 1743' ran swab. Well kicked off, flowed gas and frac water.

5-17-85 Bled off, flowed gas and frac water. Hooked up tank battery

5-18-85 Flowing on 32/64" Choke, 22 BW, 24 B0 in 14 hours.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

*Lupiana Ostrom*

TITLE

*Production*

DATE

*6-7-85*

(This space for Federal or State office use)


APPROVED BY ACCEPTED FOR RECORD TITLE

CONDITIONS OF APPROVAL, IF ANY:

JUL 1 1985

\*See Instructions on Reverse Side

CARISBAD, NEW MEXICO

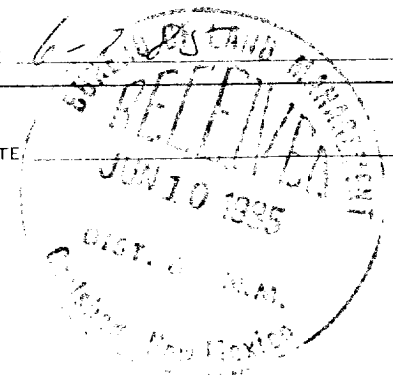

5-19-85 Flowing 32/64" Choke, 80 B0, 24 BW in 24 hours.

5-20-85 Flowing on 32/64" Choke, 56 B0, 4 BW in 18 hours.

5-21-85 Flowing on 24/64" Choke, 76 B0, no water.

5-22-85 SI to build tank battery.

5-23-85 to 5-30-85

5-30-85 Turned well on at 2:00 PM MST

5-31-85 Produced 66 B0, no water