


YATES PETROLEUM CORPORATION
Logan ASO Federal Com #1
Section 15-T17S-R27E
Eddy County, New Mexico

SUNDRY NOTICE CONTINUED:

at 9131'. TOOH with setting tool and rigged down wireline. Flared casing down. TIH with 2-3/8" tubing. Latched onto packer at 9131'. Removed BOP and nipped up wellhead. Loaded annulus with 2% KCL water with corrosion inhibitor and tested to 1400 psi. Pumped 2 bbls 2% KCL water down tubing as a cushion for bar. Dropped bar and TCP guns fired, perforating 9162-9190' w/116 .38" holes (4 SPF - Morrow). Flared well to pit. Flow tested. Shut well in. Released well to production department.

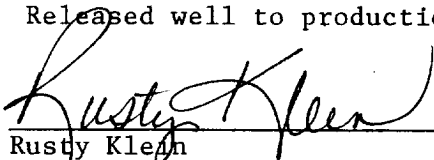

Rusty Kleen
Operations Technician
September 17, 1998

RECEIVED
HONORARY OFFICE
HONORARY OFFICE

SEP 18 A 9 34

RECEIVED