

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

3160-5
Bureau of Land Management
Division

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well ☒ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FSL & 660' FEL of Section 30-T17S-R27E (Unit P, SESE)

5. Lease Designation and Serial No.

LC-026874F

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Dosequis ASQ Fed Com #1

9. API Well No.

30-015-30464

10. Field and Pool, or Exploratory Area

Wildcat Morrow

11. County or Parish, State

Eddy Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Production casing & cement



- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

TD 9370'. Reached TD at 12:30 PM 3-12-99. Ran 226 joints of 4-1/2" 11.6# M-95 (9383.05') of casing set at 9370'. Float shoe set at 9370'. Float collar set at 9334'. Bottom marker set at 8490'. Top marker set at 8470'. Cemented with 575 sacks Super C Modified (61-15-11), 5#/sack gilsonite, 5/10% FL25 and 5/10% FL52 (yield 1.63, weight 13.0). Tailed in with 75 sacks Class C and 7/10% FL25 (yield 1.33, weight 14.8). PD 7:45 AM 3-14-99. Bumped plug to 2000 psi for 1 minute, OK. WOC. NOTE: Displaced casing with 2% KCL. Notified Duncan Whitlock w/BLM-Carlsbad of cementing - no witness. Released rig at 12:00 PM 3-14-99.

Waiting on completion unit.

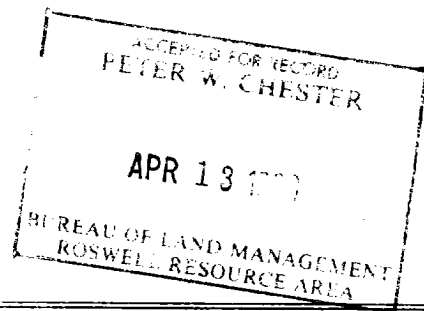

14. I hereby certify that the foregoing is true and correct

Signed Rusty Klein

Title Operator/Technician

Date March 23, 1999

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: