

CLSF

N.M. Oil Cons. Division  
811 S. 1st Street  
Artesia, NM 88210-2834

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1780' FNL & 990' FWL of Section 33-T16S-R27E (Unit E, SWNW)

5. Lease Designation and Serial No.

NM-93190

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Lucky Lobo ASX Fed Com #1

9. API Well No.

30-015-30667

10. Field and Pool, or Exploratory Area

Undesignated Morrow

11. County or Parish, State

Eddy Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other Production casing & cement


☐ Change of Plans  
☐ New Construction  
☐ Non Routine Fracturing  
☐ Water Shut Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

TD 8950'. Reached TD at 2:30 PM 7-18-99. Ran 215 joints of 4-1/2" 11.6# M95/110HC 8rd LT&C (8970.12') of casing set at 8950'. Float shoe set at 8950'. Float collar set at 8905'. Bottom marker set from 8643-8665'. Pumped 500 gallons of mud flush ahead of 810 sacks Super Modified C, .6% FL25, .6% FL52, 2% salt and 5#/sack gilsonite (yield 1.65, weight 13.1). Tailed in with 75 sacks "C" and .7% FL25 (yield 1.33, weight 14.8). PD 5:45 PM 7-20-99. Bumped plug to 1925 psi for 3 minutes. No cement circulated. WOC. Released rig at 9:45 PM 7-20-99. NOTE: Displaced with 138 bbls 2% KCL water.

Waiting on completion unit.

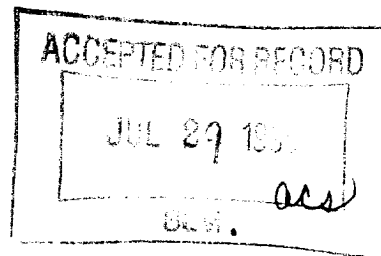

14. I hereby certify that the foregoing is true and correct

Signed

Title Operations Technician

Date July 26, 1999

(This space for Federal or State office use)

Approved by  
Conditions of approval, if any:

Title

Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side