

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS


851 S. 1st Street

Artesia, NM 88210-2834

Do not use this form for proposals to drill or to deepen or reentry to a different formation.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☐ Oil ☒ Gas ☐ Other
2. Name of Operator
Mewbourne Oil Company
3. Address and Telephone No.
P. O. Box 5270, Hobbs, NM 88241
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1980' FSL & 660' FEL of Section 17, T17S, R27E



7. If Unit or CA, Agreement Designation

8. Well Name and No.

Federal "R" #2

9. API Well No.

30-015-3075 2

10. Field and Pool, or Exploratory Area

Logan Draw Morrow

11. County or Parish, State

Eddy

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

9/14/99

Spudded well at 10:00 PM.

9/15/99


Drilled 17-1/2" hole to 343'. Set 8 joints 13-3/8" 48# H40 casing at 343'. Cemented casing with 190 sacks Pozmix 35:65 Class C cement (with 2% CaCl) and 200 sacks Class C cement (with 2% CaCl). Circulated 52 sacks cement to surface.

9/18/99

Drilled 12-1/4" hole to 1513'. Set 34 joints 8-5/8" 32# J55 casing at 1513'. Cemented casing with 850 sacks Pozmix 35:65 Class C cement (with 2% CaCl, 6% gel, and 5#/sack gilsonite) and 200 sacks cement (with 2% CaCl). Circulated 102 sacks cement to surface.

9/19/99

Tested BOP's to 3000 psi. Tested casing seat to 11.5 ppg MWE.

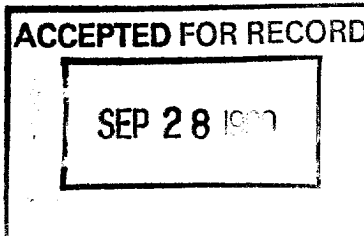

14. I hereby certify that the foregoing is true and correct

Signed [Signature]
(This space for Federal or State office use)

Title District Manager

Date 09/22/99

Approved by _____
Conditions of approval, if any:

Title _____

Date _____

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side