

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Co Division
811 S. 1st Street
Artesia, NM 88210-2834

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

CLSI

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator


CONCHO RESOURCES INC.

3. Address and Telephone No.

110 W. LOUISIANA STE 410; MIDLAND, TX 79701 (915) 683-7443

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1650' FSL & 660' FEL, SEC. 25, T-162, R-27E

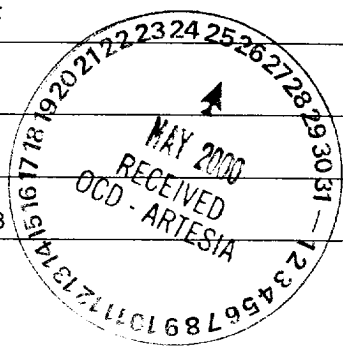

5. Lease Designation and Serial No.

NM 98807

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

CARBON VALLEY '25' FEDERAL #1

9. API Well No.

3001530953

10. Field and Pool, or Exploratory Area

CROW FLATS MORROW

11. County or Parish, State

EDDY CO., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

TYPE OF ACTION

- Abandonment
- Recompletion
- Plugging Back
- Casing Repair
- Altering Casing
- Other CHANGE CASING
- Change of Plans
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water


(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

CONCHO RESOURCES INC. RESPECTFULLY REQUEST APPROVAL TO CHANGE THE CASING DETAIL FOR THE CARBON VALLEY '25' FEDERAL NO. 1 AS FOLLOWS:

1. DRILL 25" HOLE TO 40'. SET 40' OF 20" CONDUCTOR AND CEMENT TO SURFACE WITH REDI-MIX.
2. DRILL 11" HOLE TO 1325'. SET 8-5/8", K-55, 32#, ST& C CASING. CEMENT WITH 550 SX 35/65 POZ 'C' + 200 SX 15/85 POZ 'C' CEMENT. CIRC CEMENT TO SURFACE.
3. DRILL 7-7/8" HOLE TO 9500'. RUN & SET 9500' OF 5-1/2" CASING AS FOLLOWS: 1800' OF 17#, N-80, LT&C CASING; 6000' OF 15.5#, J-55, LT&C CASING, 1700' OF 17#, N-80, LT&C CASING. CEMENT 1ST STAGE W/ 900 SX OF CLASS 'H' PREMIUM PLUS CEMENT + ADDITIVES, 2ND STAGE W/ 600 SX OF CLASS 'C' + ADDITIVES. CIRC CEMENT TO SURF.

(ORIG. SGD.) GARY GOURLEY

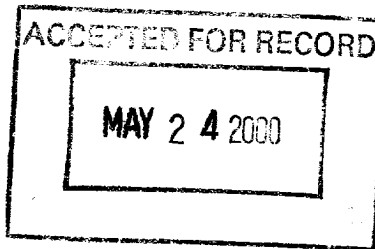

14. I hereby certify that the foregoing is true and correct

Signed [Signature]

Title PRODUCTION ANALYST

Date 05/17/00

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any: _____

Title _____

Date _____