3 4 5 6 Revised October 18, 1994 District I State of New Mexico PO Box 1980, Hobbs, NM 88241-1980 Energy, Minerals & Natural Resources Department Instructions on back 811 South First, Artesia, NM 88210 Submit to Appropriate District Office State Lease - 6 Copies District III OIL CONSERVATION DIVISION 1000 Rio Brazos Rd., Aztec, NM 87410 RECEIVED Fee Lease - 5 Copies 2040 South Pacheco 2040 South Pacheco, Santa Fe, NM 87505 AMENDED REPORT Santa Fe, NM 87505 APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN ØR ADD A ZONE <u> 9202122</u> 2OGRID Number Operator Name and Address MARBOB ENERGY CORPORATION 14049 P.O. BOX 227 ARTESIA, NM 88210 3API Number 30 - 0 -31424 6Well No. ₅Property Name ₄Property Code 8 "D" STATE 25375 Surface Location Feet from the North/South line Feet from the East/West Line County UL or lot no. Section Township Range Lot Idn **NORTH** 1650 **EAST EDDY** 430 28E В 35 17S Proposed Bottom Hole Location If Different From Surface North/South line Feet from the East/West Line County Lot Idn Feet from the Township Range Section UL or lot no. 10Proposed Pool 2 9Proposed Pool 1 ARTESIA GLORIETTA YESO 13Cable/Rotary 14Lease Type Code 16Ground Level Elevation 12Well Type Code 11Work Type Code R S 3674 18Formation 19Contractor 20 Spud Date 16Multiple 17Proposed Depth **YESO** L&R 11-30-00 4700 No Minimum WOC time | 8 hrs. 21 Proposed Casing and Cement Program Casing Size Casing weight/foot Setting Depth Sacks of Cement Estimated TOC Hole Size 300 SX 500 CIRC < 8 5/8" 24# 12 1/4" 17# 4700 600 SX 7 7/8' 5 1/2 SUFFICIENT TO COVER 200' ABOVE ALL KNOWN OIL AND GAS HORIZONS ²²Describe the proposed program. If this application is to DEEPEN or PLUG BACK give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary DRILL TO 500', RUN & CMT 8 5/8" CSG, REDUCE HOLE & DRILL TO 4700', RUN & CMT 5 1/2" CSG, PUT WELL ON **PRODUCTION**

²³I hereby certify that the information given above is true and complete to the **OIL CONSERVATION DIVISION** best of my knowledge and belief. Approved By: Signature KRIIA ORIGINAL SIGNED BY THE W. GLIM Title **BISTRICT H SUPERVISOR** Printed name: **ROBIN COCKRUM** Approval Date 0 3 2001 PRODUCTION ANALYST Conditions of Appr Phone: 748-3303 Date: 10-30-00 Attached:

DISTRICT I P.O. Box 1980, Hobbs, NM 86241-1980

State of New Me.

Energy, Minerals and Natural Resources Dep. ... ment

Form C-102 Revised February 10, 1994 Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT II P.O. Drawer DD, Artonia, NM 86211-6719

DISTRICT III 1000 Rio Brazos Rd., Asteo, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

DISTRICT IV P.O. Box 2066, Santa Fe, NM 87504-2068

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool Name				
	96830	ARTESIA GLORIETTA YESO				
Property Code 25375	-	TATE Well Number				
OGRID No. 14049		or Name Elevation SY CORPORATION 3674				

Surface Location


	UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line			
-	D	75	47 6	20 -				Feet from the	East/West line	County
- [ם	35	1 1/ 5	28 E		430	NORTH	1650	EAST	
		<u> </u>	<u> </u>		L			1000	LA31	EDDY

Bottom Hole Location If Different From Surface

							,		
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres	Joint o	r Infill Co	nsolidation	Code Or	der No.				
40									


NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

THE DIVISION
OPERATOR CERTIFICATION I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.
 Signature ROBIN COCKRUM
Printed Name PRODUCTION ANALYST Title 10/30/00 Date
SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervison and that the same is true and
 OCTOBER 19, 2000 Date Surveyed JLP Signature & Seal of Professional Surveyor
Mmolel & Balan 10/20/00 W.O. Num. 00-11-1202
Certificate No. Ronald Edson, 3239 GARY GE EIDSON, 12841

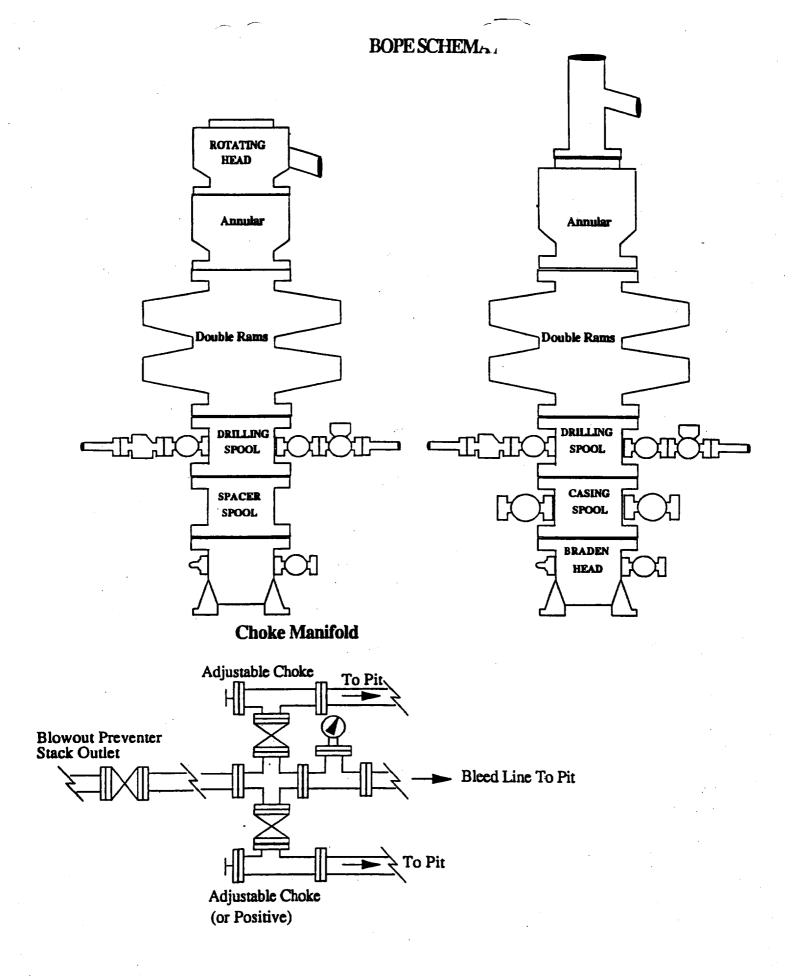

MINIMUM CHOKE MANIFOLD 3,000, 5,000 and 10,000 PSI Working Pressure

3 MWP - 5 MWP - 10 MWP

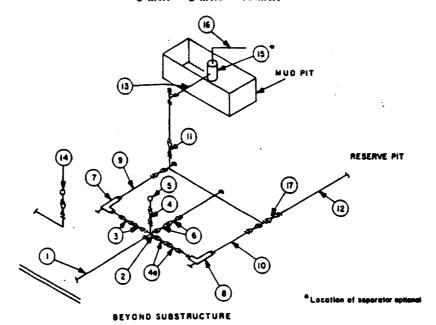

			MINII	NUM REQL	JIREMENTS	5				
		T	3,000 MWP		5,000 MWP			10,000 MWP		
No.		1.D.	NOMINAL	RATING	1.D.	NOMINAL	RATING	1. D .	NOMINAL	RATING
1	Line from drilling spool		3-	3,000		3″	5,000		3-	10,000
2	Cross 3"x3"x3"x2"			3,000			5,000			
-	Cross 3"x3"x3"x3"									10,000
3	Valves(1) Gate □ Plug □(2)	3-1/8*		3,000	3-1/8"		5,000	3-1/8"		10,000
4	Valve Gate ☐ Plug ☐(2)	1-13/16"		3,000	1-13/16*		5,000	1-13/16*		10,000
48	Valves(1)	2-1/16"		3,000	2-1/16"		5,000	3-1/8"		10,000
5	Pressure Gauge			3,000			5,000			10,000
6	Valves Gale □ Plug □(2)	3-1/6"		3,000	3-1/8"		5,000	3-1/8"		10,000
7	Adjustable Choke(3)	2°		3,000	5.		5,000	2"		10,000
8	Adjustable Choke	1"		3.000	1"		5,000	2*		10,000
9	Line		3"	3,000		3"	5,000		3"	10,000
10	Line		2*	3,000		2.	5,000		3*	10,000
11	Valves Gate □ Plug □(2)	3-1/8"		3,000	3-1/8*		5,000	3-1/8"		10,000
12	Lines		3.	1,000		3.	1,000		3.	2,000
13	Lines		3"	1,000		3*	1,000		3"	2,000
14	Remote reading compound standpipe pressure gauge			3,000			5,000			10,000
15	Gas Separator		2'x5'			2'x5'			2'x5'	
16	Line		4"	1,000		4"	1,000		4"	2,000
17	Valves Gate □ Plug □(2)	3-1/8"		3,000	3-1/8*		5,000	3-1/8*		10,000

- (1) Only one required in Class 3M.
- (2) Gate valves only shall be used for Class 10M.
- (3) Remote operated hydraulic choke required on 5,000 psi and 10,000 psi for drilling.

EQUIPMENT SPECIFICATIONS AND INSTALLATION INSTRUCTIONS

- 1. All connections in choke manifold shall be welded, studded, flanged or Cameron clamp of comparable rating.
- 2. All flanges shall be API 6B or 6BX and ring gaskets shall be API RX or BX. Use only BX for 10 MWP.
- 3. All lines shall be securely anchored.
- 4. Chokes shall be equipped with tungsten carbide seats and needles, and replacements shall be available.
- Choke manifold pressure and standpipe pressure gauges shall be available at the choke manifold to assist in regulating chokes. As an atternate with automatic chokes, a choke manifold pressure gauge shall be located on the rig floor in conjunction with the standpipe pressure gauge.
- 6. Line from drilling spool to choke manifold should be as straight as possible. Lines downstream from chokee shall make turns by large bends or 90° bends using bull plugged tees.