District I PO Box 1980, Hobb District II 811 South First, Art District III 1000 Rio Brazos Ro District IV 2040 South Pached	esia, NM 882° d., Aztec, NM 9	10 87410 NM 87505	RMIT	Energy, Min OIL COI 20 Sa TO DRI	NSERVAT NSERVAT 140 South Anta Fe, N LL, RE-EN	M 87505 $^{ m extsf{^{1}}}$	3742500 3742500	Subr	/4 [State Leading AMEND	Form C-101 tober 18, 1994 ctions on back District Office ase - 6 Copies ase - 5 Copies ED REPORT	8
MARBOB EN P.O. BOX 22 ARTESIA, NM	7	ORPORAT		or Name and	Address					3AP	14049 1 Number - 31425	
₄Property					₅Prope	rty Name				i i	₀Well No. 9	ŀ
2537	75 		" STATE									
					-,Surface	Location						_
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South I		Feet from the		/West Line	County	
Α	35	17S	28E		430	NORTH		330	t	EAST	EDDY	
		₃Prop	osed B	ottom F	lole Locat	ion If Diffe	rent	From Surfa	ace			
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South I	ine	Feet from the	East	/West Line	County	
ARTESIA GI	ORIETT	₃Propose A YESO	d Pool 1					₁₀Propose	ed Pool	2		
												_
11Work Ty			12Well Type O	Code	1	ble/Rotary ₄Lease Type Code R S				₁₅Ground Levet Elevation 3668		
16ML N	ıltiple		17Proposed		18F0 YESO	18Formation 19Contractor				20Spud Date 11-30-00		
Minimum		time 17			d Casing :	and Ceme	nt P	rogram		l		
Hole Siz		Casing		- 	weight/foot	Setting Dep		Sacks of Cer	nent	Esti	mated TOC A	\neg
	1/4"	0001119	8 5/8"		24#		500'	30	0 SX	-	CIRC S	UF
	7/8"		5 1/2"		17#	47	700'	60	0 SX	SUFFICIE	NT TO COVER	
										200' ABO'	VE ALL KNOWN	
										OIL AND	GAS HORIZONS	_
												_
Describe the blo	owout preventions	ntion prograr	n, if any. Us	se additional	sheets if necessa	ary.		esent productive z				e.
²³ I hereby certify	that the info	ormation give	n above is t	rue and com	plete to the	Ω	IL C	ONSERVA	TIO	N DIVIS	ION	
best of my know Signature:	leage and b	Λ		~		Approved By:		EIGHNAL SIG				
5%C	walk	ω	Live	<u>n)</u>		Title:	_	STRICT II SI			. Golygod	4
Printed name:	ROBIN C	OCKRUM										_
Title: PRODI	JCTION A	ANALYST					NOV	0 5 2000	Expira	tion Date:	OV 05 20	101
Date:	10-30-00		Phone	^{3:} 748-3303		Conditions of App Attached:	oroval:			· · · · · · · · · · · · · · · · · · ·		

0042.3.2000

DISTRICT I P.O. Bex 1980, Hobbs, NM 88241-1980

State of New Mexico

Energy, Minerals and Natural Resources Department

Form C-102 Revised February 10, 1994 Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT II P.O. Drawer BD, Artonia, NM 88211-0719

DISTRICT III

DISTRICT IV

1000 Rio Braxos Rd., Axtec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088 Santa Fe, New Mexico 87504-2088

P.O. Box 2068, Santa Fe, NM 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool Name
	96830	ARTESIA GLORIETTA YESO
Property Code	Property	Name Well Number
25375	D STA	
OGRID No. 14049	Operator MARBOB ENERGY	i Wevacou

Surface Location


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	35	17 S	28 E		430	NORTH	330	EAST	EDDY

Bottom Hole Location If Different From Surface

			, 						
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres	Joint o	r Infill Co	nsolidation (Code Ore	der No.	1			


NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

		· · · · · · · · · · · · · · · · · · ·	
		. 330 430	OPERATOR CERTIFICATION I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.
	-		ROBIN COCKRUM Printed Name
			PRODUCTION ANALYST Title 10/30/00 Date SURVEYOR CERTIFICATION
			I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervison, and that the same is true and correct to the best of my belief.
			OCTOBER 19, 2000 Date Surveyed JLP Signature & Seal of Professional Surveyor
			W.O. Num: -00-11-1203 Certificate No. RONALD J. EIDSON, 3239 GARY G. EIDSON, 12841

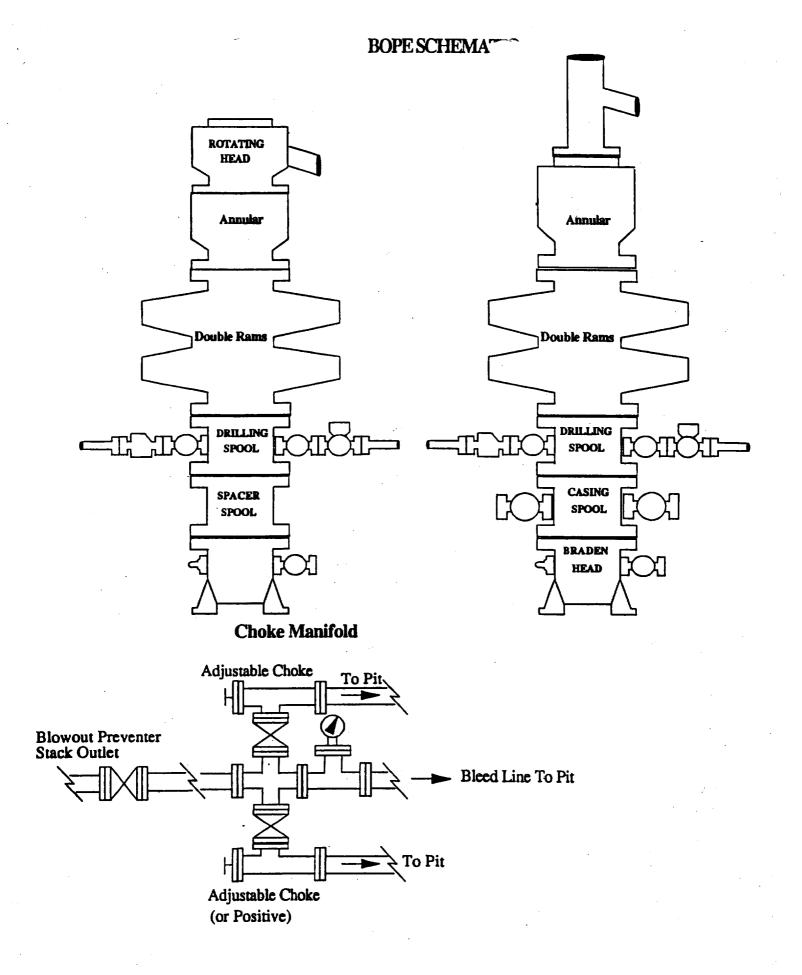

MINIMUM CHOKE MANIFOLD 3,000, 5,000 and 10,000 PSI Working Pressure

3 MWP - 5 MWP - 10 MWP

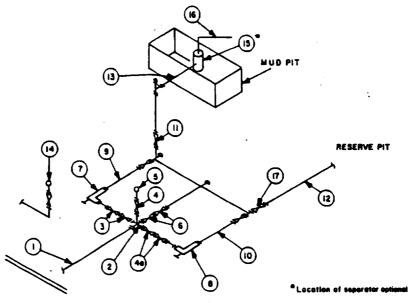

			 1101	URE
8 S Y	ana	SUBS	 	URE

			MINI	MUM REQU	HREMENTS	<u>\$</u>				
	T	1	3,000 MWP			5,000 MWP			10,000 MWF	•
No.		I.D.	NOMINAL	RATING	1.D.	NOMINAL	RATING	I.D.	NOMINAL	RATING
1	Line from dritting spool		3*	3,000		3*	5,000		3*	10,000
	Cross 3"x3"x3"x2"			3,000			5,000			
٤.	Cross 3"x3"x3"x3"									10,000
3	Valves(1) Gate ☐ Plug ☐(2)	3-1/8*		3,000	3-1/8"		5,000	3-1/8"		10,000
4	Valve Gate □ Plug □(2)	1-13/16"		3,000	1-13/16*		5,000	1-13/16*		10,000
48	Valves(1)	2-1/16"		3,000	2-1/16"	<u> </u>	5,000	3-1/8"	<u> </u>	10,000
5	Pressure Gauge			3,000			5,000			10,000
6	Valves Gate □ Plug □(2)	3-1/6"		3,000	3-1/8"	<u>.</u>	5,000	3-1/8*		10,000
7	Adjustable Choke(3)	2*		3,000	2*		5,000	2*	I	10,000
8	Adjustable Choke	1*		3.000	1"		5,000	2"]	10,000
9	Line		3"	3,000		3"	5,000		3°	10,000
10	Line		2"	3,000		2"	5,000		3.	10,000
11	Valves Gate ☐ Plug ☐(2)	3-1/8"		3,000	3-1/8"		5,000	3-1/8"		10,000
12	Lines		3"	1,000		3*	1,000		3"	2,000
13	Lines		3"	1,000		3.	1,000	<u></u>	3*	2,000
14	Remote reading compound standpipe pressure gauge			3,000			5,000			10,000
15	Gas Separator		2'x5'			2'x5'			2'x5'	L
16	Line		4"	1,000		4"	1,000		4"	2.000
17	Valves Gate □ Plug □(2)	3-1/8°		3,000	3-1/8*		5,000	3-1/8"		10,000

- (1) Only one required in Class 3M.
- (2) Gate valves only shall be used for Class 10M.
- (3) Remote operated hydrautic choke required on 5,000 psi and 10,000 psi for drilling.

EQUIPMENT SPECIFICATIONS AND INSTALLATION INSTRUCTIONS

- 1. All connections in choke manifold shall be welded, studded, flanged or Cameron clamp of comparable rating.
- 2. All flanges shall be API 6B or 6BX and ring gaskets shall be API RX or BX. Use only BX for 10 MWP.
- 3. All lines shall be securely anchored.
- 4. Chokes shall be equipped with tungsten carbide seats and needles, and replacements shall be available.
- Choke manifold pressure and standpipe pressure gauges shall be available at the choke manifold to assist in regulating chokes. As an atternate with automatic chokes, a choke manifold pressure gauge shall be located on the rig floor in conjunction with the standpipe pressure gauge.
- Line from drilling spool to choke manifold should be as straight as possible. Lines downstream from chokee shall make turns by large bends or 90° bends using bull plugged tees.