District I PO Box 1980, Hobbs, NM 88241-1980

State of New Mexico

Energy, Minerals & Natural Resources Department

Form C-101
Revised October 18, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 6 Copies
Fee Lease - 5 Copies

District II 811 South First, Artesia, NM 88210

District III 1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION 2040 South Pacheco

0 . 6 . 114.07505						, NM 87505				AMENDED REPORT			
APPLICA	TION F	OR PE				NTER, DE	EPEI	V, FLUGB	ĄCK,				
MARBOB EN PO BOX 227	ORPORATIO	l Address	AUG 2001 RECEIVED OCD - ARTESIA				2○(₂OGRID Number 14049					
ARTESIA, NI				OCD - ARTESIA				30 - 0 [S - 3 [96					
₄Property 2537		DS	TATE		sProperty Name					∘Well No. 22			
					∍Surfac	e Location				•			
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South	line	Feet from the	East/	East/West Line Coun			
Р	25	17S	28E		840	SOUTH 330			EAST EDDY				
Proposed Bottom Hole Location If Different From Surface													
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South	line	Feet from the	East/	West Line	County		
ARTESIA GI	LORIETT	₉ Proposed I	Pool 1			₀Proposed Paol 2							
													
-	11Work Type Code N 12Well Type Code O					13 Cable/Rotary 14 Lease Type C			nde 15Ground Level Elevation 3666				
₁₅Multiple No		1	Proposed	•	YESO	ormation	nation 19Contractor		i i		₀Spud Date 09-03-01		
			₂₁ F	ropose	d Casing	and Ceme	nt Pr	ogram					
Hole Siz	ze	Casing Si	ze	Casing	weight/foot	Setting Dep	oth	Sacks of Cer	ment	Es	timated TOC		
12	2 1/4"		3 5/8"	24#		0 /	5 60'		0 SX	+	MPT TO CIRC		
7	7 7/8"		5 1/2"		17#	- 4	4700'		0 SX	SUFFICIENT TO COVER 200' ABOVE ALL KNOWN			
85/8 @ 400' 0		, C1 U	hone	Salt BEA		(Ug	Tor Deal	ins (OIL AND GAS HORIZONS			
	- 100		170 60	75.11	136N				- 31				
Describe the blo	owout prever	tion program,	if any. Us	e additional s	sheets if neces	CK give the data o sary. RILL TO 4700',					ew productive zone. ON		
²³ I hereby dentify	that the info	rmation given	above is t	rue and comp	olete to the	BX) C	JI C	ONSERVA	ATION	N DIVIS	SION		
best of my knowledge and belief. Signature:						Approved By: ORIGINAL SIGNED BY TIM W. GUM							
لل ا	CANNON	VIAN	<u> </u>	Title:		RICT II SUP							
	JCTION A					Approval Date:	AUG	17 2001	Expirati	on Date:	AUG 1 7 200		
Data	08-14-01		Phone	505-748-	3303	Conditions of Ap	proval:						

State of New Mexico

DISTRICT I P.C. Box 1980, Hobbs, NM 88241-1980

Energy, Minerals and Natural Resources Department.

Form C-102 Revised February 10, 1994

DISTRICT II P.O. Drawer DD, Artesia, NM 88211-0719

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT III

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088


Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT IV P.O. BOX 2088, SANT	A FE, N.M. 87	/504-2088	WELL LO	CATION	AND ACREA	GE DEDICATI	ON PLAT	□ AMEND	ED REPORT	
API Number			Pool Code Pool Name							
}			9	6830		ARTESIA GI	LORIETTA YES	0		
Property	Code	1	,		Property Nam	ie		Well Num	ber	
25375				22						
OGRID No.					Elevation					
14049			MARBOB ENERGY CORPORATION						3666'	
					Surface Loca	ation				
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
Р	25	17-S	28E		840	SOUTH	330	EAST	EDDY	

Bottom Hole Location If Different From Surface UL or lot No. Section Township Range Lot Idn Feet from the North/South line Feet from the East/West line County Dedicated Acres Joint or Infill Consolidation Code Order No.


NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	OR A NON-SIANDARD UNII HAS BEE	
		OPERATOR CERTIFICATION I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.
		Signature Land
		DIANA J. CANNON Printed Name PRODUCTION ANALYST Title
		AUGUST 15, 2001 Date SURVEYOR CERTIFICATION
		I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervison, and that the same is true and correct to the best of my belief.
 		AUGUST 09, 2001 Date Surreyeld Seal of Professional Surveyor
		Certificate No. RONALD J. EIDSON 3239 GARY EIDSON 12641

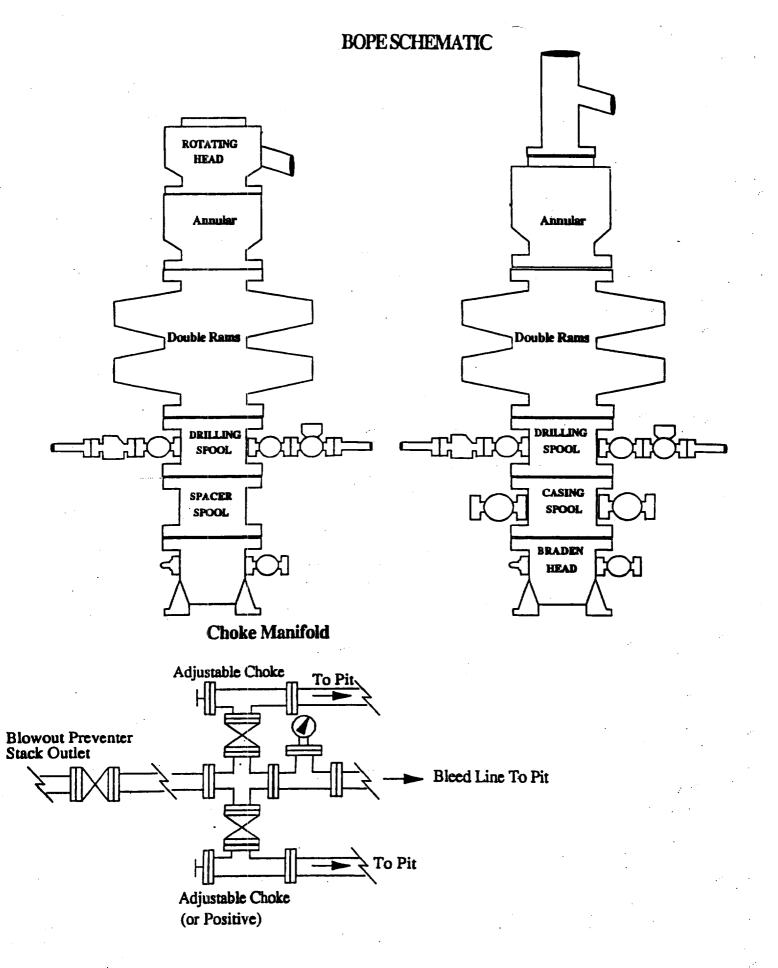

MINIMUM CHOKE MANIFOLD 3,000, 5,000 and 10,000 PSI Working Pressure

3 MWP - 5 MWP - 10 MWP

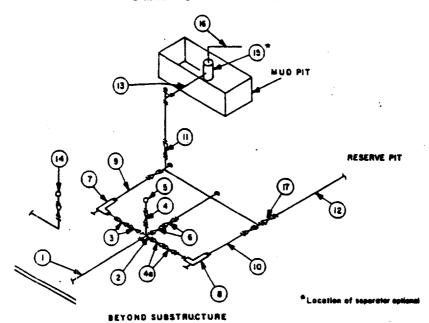

			MINI	MUM REQU	IIREMENTS	3		•		
		3,000 MWP			5,000 MWP			10,000 MWP		
No.		I.D.	NOMINAL	RATING	1.D.	NOMINAL	RATING	I.D.	NOMINAL	RATING
1	Line from drilling spool		3*	3,000		3″	5,000		3*	10,000
2	Cross 3"x3"x3"x2"	7		3.000			5,000		1	
٤.	Cross 3"x3"x3"x3"									10,000
3	Valves(1) Gale □ Plug □(2)	3-1/8*		3,000	3-1/8"		5,000	3-1/8*		10,000
4	Valve Gale [2]	1-13/16"		3,000	1-13/16*		5,000	1-13/16*		10,000
48	Valves(1)	2-1/16"		3,000	2-1/16"	<u> </u>	5,000	3-1/8"		10,000
5	Pressure Gauge			3,000	<u> </u>		5,000			10,000
6	Valves Gate □ Valves Plug □(2)	3-1/6"		3,000	3-1/0"		5,000	3-1/6"		10,000
7	Adjustable Choke(3)	2°		3,000	2"		5,000	2"		10,000
	Adjustable Choke	1.		3,000	1"		5,000	2"		10,000
9	Line		3″	3,000		3°	5,000		3"	10,000
10	Line		2*	3,000		2.	5,000		3*	10,000
11	Valves Gate □ Plug □(2)	3-1/8"		3,000	3-1/8"		5,000	3-1/8*		10,000
12	Lines		3*	1,000		3.	1,000		3*	2,000
13	Lines		3*	1,000	<u> </u>	3*	1,000		3"	2,000
14	Remote reading compound standpipe pressure gauge			3,000			5,000			10,000
15	Gas Separator		2'x5'			2'x5'			2'x5'	
16	Line		4"	1,000		4"	1,000		4°	2,000
17	Valves Gate □ Plug □(2)	3-1/8*		3,000	3-1/8"		5,000	3-1/6"		10,000

- (1) Only one required in Class 3M.
- (2) Gate valves only shall be used for Class 10M.
- (3) Remote operated hydraulic choke required on 5,000 psi and 10,000 psi for drilling.

EQUIPMENT SPECIFICATIONS AND INSTALLATION INSTRUCTIONS

- 1. All connections in choke manifold shall be welded, studded, flanged or Cameron clamp of comparable rating.
- 2. All flanges shall be API 6B or 6BX and ring gaskets shall be API RX or 6X. Use only BX for 10 MWP.
- 3. All lines shall be securely anchored.
- 4. Chokes shall be equipped with tungsten carbide seats and needles, and replacements shall be available.
- Choke manifold pressure and standpipe pressure gauges shall be available at the choke manifold to assist in regulating chokes. As an alternate with automatic chokes, a choke manifold pressure gauge shall be located on the rig floor in conjunction with the standpipe pressure gauge.
- Line from drilling spool to choke manifold should be as straight as possible. Lines downstream from chokes shall make turns by large bends or 90° bends using bull plugged tees.