


## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

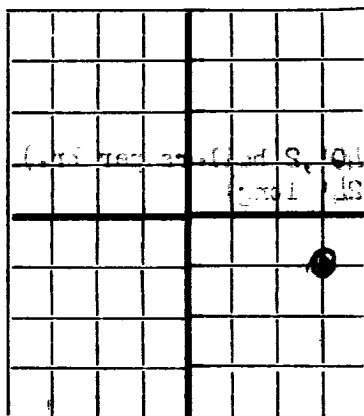

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or the proper agent not more than thirty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Dublin &amp; Franklin

1009 North Main, Midland, Texas.

Company or Operator  
State 29E Well No. 1 in NESE of Sec. 33 T. 17S  
Lease  
B. 29E, N. M. P. M., Anderson Field, Eddy County  
Well is 3300 feet south of the North line and 660 feet west of the East line of Sec 33  
If State land the oil and gas lease is No. B-7762 Assignment No. 08  
If patented land the owner is 08, Address 08  
If Government land the permittee is 08, Address 08  
The Lessee is J. S. Dublin, Address Midland, Texas  
Drilling commenced 1-25- 19 46 Drilling was completed 3-11 19 46  
Name of drilling contractor Miller & Miller, Address Box 725, Artesia, New Mex.  
Elevation above sea level at top of casing 3648 feet.  
The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 2065 to 2085 No. 4, from 2625 to 2630  
No. 2, from 2127 to 2136 No. 5, from 08 to 08  
No. 3, from 2545 to 2572 No. 6, from 08 to 08

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 240 to 250 feet.  
No. 2, from Increase 260 to 265 feet.  
No. 3, from 1852 to 1858 feet.  
No. 4, from 08 to 08 feet.

## CASING RECORD

| SIZE  | WEIGHT PER FOOT | THREADS PER INCH | MAKE  | AMOUNT  | KIND OF JOINT   | CUT & FILLED FROM | PERFORATED | PURPOSE |
|-------|-----------------|------------------|-------|---------|-----------------|-------------------|------------|---------|
| 8 1/4 | 30              | 8                | Nat'l | 381' 2" | Texas           | 2nd Hand          | 08         | 08      |
| 7 OD  | 20              | 8                | Nat'l | 1876'   | Halliburton New | 08                | 08         | 08      |
|       |                 |                  |       |         |                 |                   | 08         | 08      |
|       |                 |                  |       |         |                 |                   | 08         | 08      |
|       |                 |                  |       |         |                 |                   | 08         | 08      |
|       |                 |                  |       |         |                 |                   | 08         | 08      |
|       |                 |                  |       |         |                 |                   | 08         | 08      |
|       |                 |                  |       |         |                 |                   | 08         | 08      |

## MUDDING AND CEMENTING RECORD

| SIZE OF HOLE | SIZE OF CASING | WHERE SET | NO. SACKS OF CEMENT | METHODS USED | MUD GRAVITY | AMOUNT OF MUD USED |
|--------------|----------------|-----------|---------------------|--------------|-------------|--------------------|
| 10"          | 8 1/4          | 381' 2"   | 50                  | Halliburton  |             | 25 sacks           |
| 8 1/4        | 7" OD          | 1876      | 50                  | Halliburton  |             | -0-                |
|              |                |           |                     |              |             |                    |

## PLUGS AND ADAPTERS

Heaving plug—Material 08 Length 08 Depth Set 08  
Adapters—Material 08 Size 08

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

| SIZE   | SHELL USED | EXPLOSIVE OR CHEMICAL USED | QUANTITY | DATE    | DEPTH SHOT OR TREATED | DEPTH CLEANED OUT |
|--------|------------|----------------------------|----------|---------|-----------------------|-------------------|
| 3 1/2" | tin        | Nitro                      | 40 qts.  | 3-14-46 | 2545-65               |                   |
| 2 1/2" | tin        | Nitro                      | 90 qts.  | 3-14-46 | 2565-2655             |                   |
| 5 1/2" | tin        | solidified                 | 140 qts. | 3-14-46 | 2655-2687             |                   |

Results of shooting or chemical treatment 08

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 08 feet to 08 feet, and from 08 feet to 08 feet  
Cable tools were used from top feet to TD feet, and from 08 feet to 08 feet

## PRODUCTION

Put to producing 3-16- 19 46  
The production of the first 24 hours was 50 barrels of fluid of which 100 % was oil; 08 % emulsion; 08 % water; and 08 % sediment. Gravity, Be. 40°  
If gas well, cu. ft. per 24 hours 08 Gallons gasoline per 1,000 cu. ft. of gas 08  
Rock pressure, lbs. per sq. in. 300

## EMPLOYEES

08, Driller 08, Driller  
08, Driller 08, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 08

Place 08 Date 08

day of 08, 19 08

Name 08

Position 08

Representing 08

Company or Operator

My Commission expires 08

Address 08

Notary Public

## FORMATION RECORD

| FROM | TO   | THICKNESS<br>IN FEET | FORMATION                                 |
|------|------|----------------------|-------------------------------------------|
| 0    | 20   | 20                   | Caliche                                   |
| 20   | 115  | 95                   | Red Bed                                   |
| 115  | 145  | 30                   | Red Bed Sandy                             |
| 145  | 260  | 115                  | Red Bed (Water @ 249', 2 bailers per hr.) |
| 260  | 265  | 5                    | Sand & RB (9" tube, 24' long)             |
| 265  | 295  | 30                   | RB                                        |
| 295  | 325  | 30                   | Anhydrite                                 |
| 325  | 387  | 62                   | Red Bed                                   |
| 387  | 800  | 413                  | Salt                                      |
| 800  | 825  | 25                   | Anhydrite                                 |
| 825  | 905  | 80                   | Anhydrite & Red Bed                       |
| 905  | 1005 | 100                  | Anhydrite                                 |
| 1005 | 1035 | 30                   | Anhy. & Red Bed.                          |
| 1035 | 1065 | 30                   | Red Bed                                   |
| 1065 | 1125 | 60                   | Anhy & Red Shale                          |
| 1125 | 1340 | 215                  | Anhydrite                                 |
| 1340 | 1345 | 5                    | Lime broken                               |
| 1345 | 1370 | 25                   | Anhy & Lime                               |
| 1370 | 1535 | 155                  | Anhy                                      |
| 1535 | 1560 | 25                   | Anhy & Lime Shells                        |
| 1560 | 1620 | 60                   | Anhy                                      |
| 1620 | 1680 | 60                   | Red Rock & Anhy                           |
| 1680 | 1772 | 92                   | Anhy                                      |
| 1772 | 1785 | 13                   | Lime & Red Rock                           |
| 1785 | 1810 | 25                   | Anhydrite                                 |
| 1810 | 1820 | 10                   | Anhy & Shale                              |
| 1820 | 1830 | 10                   | Lime                                      |
| 1830 | 1839 | 9                    | Sand & Shale                              |
| 1839 | 1858 | 19                   | Sand & Shale (Water 1852 to 58)           |
| 1858 | 1872 | 14                   | Lime (Hole Full)                          |
| 1872 | 1876 | 4                    | Lime & Anhy                               |
| 1876 | 1910 | 34                   | Lime                                      |
| 1910 | 1918 | 8                    | Anhy                                      |
| 1918 | 1940 | 22                   | Anhy & Lime                               |
| 1940 | 1980 | 40                   | Anhy                                      |
| 1980 | 1990 | 10                   | Anhy & Lime                               |
| 1990 | 2030 | 40                   | Lime                                      |
| 2030 | 2065 | 35                   | Anhy                                      |
| 2065 | 2085 | 20                   | Sand (show of gas)                        |
| 2085 | 2097 | 12                   | Anhy & Lime Shell                         |
| 2097 | 2108 | 11                   | Anhy & Sand                               |
| 2108 | 2116 | 8                    | Anhy                                      |
| 2116 | 2127 | 11                   | Anhy & Sand                               |
| 2127 | 2136 | 9                    | Sand (Show oil & little increase in gas)  |
| 2136 | 2140 | 4                    | Anhy & Sand                               |
| 2140 | 2210 | 70                   | Anhy                                      |
| 2210 | 2230 | 20                   | Anhy & Lime                               |
| 2230 | 2245 | 15                   | Anhy & Red Shale                          |
| 2245 | 2260 | 15                   | Anhy                                      |
| 2260 | 2276 | 16                   | Anhy & Lime                               |
| 2276 | 2298 | 22                   | Lime, gray                                |
| 2298 | 2492 | 194                  | Lime                                      |
| 2492 | 2527 | 35                   | Sandy Lime                                |
| 2527 | 2545 | 18                   | Lime                                      |
| 2545 | 2553 | 8                    | Sand (oil & gas)                          |
| 2553 | 2572 | 19                   | Sandy Lime (3 1/2 bailers oil in 4 hrs.)  |
| 2572 | 2625 | 53                   | Lime                                      |
| 2625 | 2630 | 5                    | Lime & Sand                               |
| 2630 | 2687 | 50                   | Lime                                      |