


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

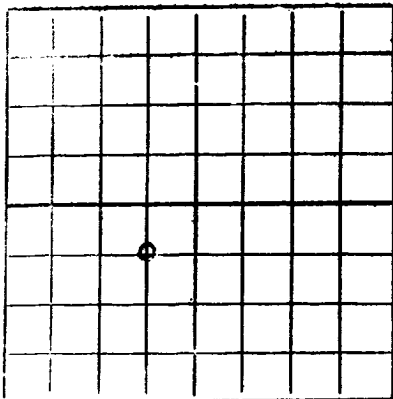

AREA 640 ACRES
LOCATE WELL CORRECTLY

Ralph Nix & Jerry Curtis Continental-State
(Company or Operator) (Lease)
Well No. 2, in NE 1/4 of SW 1/4, of Sec. 15, T. 17S, R. 29E, NMPM.
Grayburg-Jackson Pool, Eddy County.
Well is 1980 feet from South line and 1980 feet from West line
of Section 15. If State Land the Oil and Gas Lease No. is E-4200
Drilling Commenced 12-18, 1956. Drilling was Completed 1-19, 1957
Name of Drilling Contractor Roach & Shepard
Address Artesia, New Mexico
Elevation above sea level at Top of Tubing Head. The information given is to be kept confidential until
, 19.

OIL SANDS OR ZONES

No. 1, from 1079 to 1082 S.S.O. No. 4, from to
No. 2, from 2458 to 2471 /Stain Oil Sample No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 125 to 130 feet. 1/2 blr. P. H.
No. 2, from 145 to 155 feet. H. F.
No. 3, from 1825 to 1830 feet. S. S. W.
No. 4, from 2322 to 2331 feet. S. S. W.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10"		used	142'	none	142'		shut of cave
8 5/8	28 lb.	used	454'	regular	none		surface string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8 5/8	434	30	Denton	none	none

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Result of Production Stimulation
Depth Cleaned Out

LOG OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 2510 feet, and from 0 feet to 0 feet.
Cable tools were used from 0 feet to 2510 feet, and from 0 feet to 0 feet.

PRODUCTION

Put to Producing D. & A., 19.

OIL WELL: The production during the first 24 hours was barrels of liquid of which % was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity.

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy			T. Devonian		T. Ojo Alamo
T. Salt	410		T. Silurian		T. Kirtland-Fruitland
B. Salt	225		T. Montoya		T. Farmington
T. Yates			T. Simpson		T. Picture Cliffs
T. 7 Rivers			T. McKee		T. Menefes
T. Queen	1796		T. Ellenburger		T. Point Lookout
T. Grayburg			T. Gr. Wash		T. Mancos
T. San Andres	2486		T. Granite		T. Dakota
T. Glorieta			T.		T. Morrison
T. Drinkard			T.		T. Penn
T. Tubbs			T.		T.
T. Abo			T.		T.
T. Penn			T.		T.
T. Miss			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	15		Caliche	1112	1115		Gyp
15	65		Red Bed	1115	1190		Anhy & Red Bed
65	80		Sand	1190	1565		Anhy
80	195		Red Bed Gyp	1565	1580		Brown Sand
195	275		Anhy, Red Bed & Gyp	1580	1730		Anhy
275	320		Gumbo	1730	1742		Anhy & Red bed
320	375		Red Bed	1742	1796		Anhy
375	380		Salt	1796	1830		Red Sand-Water (1825-1830)
380	410		Red Bed, Some Salt				S. S. W.
410	450		Red Bed	1830	1870		Anhy
450	735		Salt	1870	1905		Anhy & Red Bed
735	835		Anhy & Red Bed	1905	1928		Anhy
835	930		Anhy	1928	1933		S. L. M.
930	955		Red Bed	1933	1975		Anhy
955	1035		Anhy & Red Bed	1975	1990		Red Sand
1035	1045		Red Bed	1990	2003		Anhy
1045	1055		Red Bed and Anhy	2003	2010		Pink Lime
1055	1079		Anhy	2010	2020		Red Sand & Anhy
1079	1082		Sand Oil--S. S. O.	2020	2045		Anhy
1082	1098		Anhy	2045	2050		Lime-White
1098	1102		Gyp. & Sand	2050	2055		Lime
1102	1105		Congs. Shale	2055	2068		Sand-Gray-Soft
1105	1109		Brown Shale	2068	2085		Anhy & Red Bed
1109	1112		Anhy	2085	2095		Anhy

From	To	Formation
2095	2135	Red Sand & Anhy
2135	2148	Anhy
2148	2165	Lime-Gray
2165	2170	Anhy
2170	2200	Red sandy Anhy
2200	2209	Anhy
2209	2230	Gray Lime
2230	2250	Lime
2250	2284	Grey Lime
2284	2375	Lime
2375	2380	Gray Sand
2380	2400	Sand & Lime
2400	2414	Pink Lime, Sand
2414	2426	Red Sand, Lime
2426	2437	Lime, Sandy (S.L.M. 2437)
2437	2443	Grey Lime
2443	2486	Gray Sandy Lime (Stain Oil 2458-2471)
2486	2510	Shite Lime

Top San Andrews 2486