


WELL DEEPENED FROM 2,403 FEET

FORM C-105

N

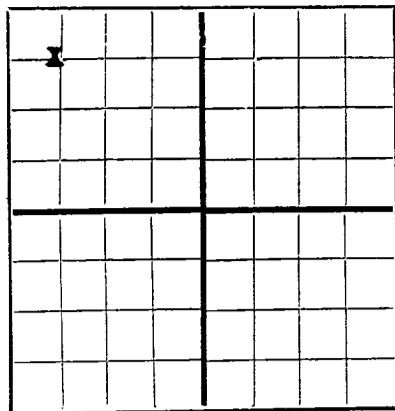

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

BOYD-PLEMONS DRILLING COMPANY
Company or Operator
ARTESIA, NEW MEXICO
Address
CONTINENTAL STATE Well No. 2 in NE NW of Sec. 27 T. 17S
Lease
R. 29 E N. M. P. M. GRAYBIRD JACKSON Field, EDDY County.
Well is 660 feet south of the North line and 4,620 feet west of the East line of SEC. 27-17-29
If State land the oil and gas lease is No. B. 7596 Assignment No.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is CONTINENTAL OIL COMPANY Address PONCA CITY, OKLAHOMA
Drilling commenced 5-8 19 50 Drilling was completed 12-31 19 50
Name of drilling contractor BOYD-PLEMONS DRILLING COMPANY Address ARTESIA, NEW MEXICO
Elevation above sea level at top of casing 3,541 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 2,370' to 2,382 No. 4, from 2,656 to 2,726
No. 2, from 2,393 to 2,398 No. 5, from to
No. 3, from 2,580 to 2,628 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from AT 256 to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
1 1/2"					REG				
8 5/8"	24	8 rd.	SWLS	272'	BEKIN				SURFACE
7"	20	8 rd.	SWLS	2213	TEX PAT.				OIL STRING

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8 5/8	272	60	DENTON	HALLIBURTON METHOD	
8"	7	2213	37	2	" " "	

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
4 & 5"	NONE	DU PONT 451	97 QTS.	7-16-50	2570 - 98	TD
		DOWELL	3500 GAL.	11-28-50	2580-2628	
		DOWELL	3,500 GAL.	1-3-51	2656-2726	

Results of shooting or chemical treatment WELL WOULD MAKE ABOUT 18 BOPD
NATURAL INCREASED TO 40 BOPD

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 2726 feet, and from feet to feet

PRODUCTION

Put to producing 1-4 19 51
The production of the first 24 hours was 40 barrels of fluid of which 100% was oil; % emulsion; % water; and % sediment. Gravity, Be 36 & 37
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

JACK PLEMONS Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 29

day of JANUARY, 19 51

Ora Mae Hymer
Notary Public

My Commission expires APRIL 15, 1952

ARTESIA, NEW MEXICO 1-29-51
Date

Name E Rex Holmes

Position AGENT

Representing BOYD-PLEMONS DRILLING COMPANY
Company or Operator

Address BOX 692, ARTESIA, NEW MEXICO

