

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Drawer DD  
Artesia, NM 88210

LEASE LC-064072

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepening back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☐ other ☐ RE-ENTRY
2. NAME OF OPERATOR  
Martin Yates III
3. ADDRESS OF OPERATOR  
ARTESIA, OFFICE  
207 So. 4th St., Artesia, NM 88210
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 330' FSL & 990' FWL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF	<input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING	<input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE	<input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES	<input type="checkbox"/>	<input type="checkbox"/>
ABANDON*	<input type="checkbox"/>	<input type="checkbox"/>


(other) Re-entry and drill deeper.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME  
Robinson Federal
9. WELL NO.  
1
10. FIELD OR WILDCAT NAME  
Loco Hills
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Unit M, Sec. 35-T17S-R29E
12. COUNTY OR PARISH  
Eddy
13. STATE  
NM
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
3538' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

MIRT. Tagged old TD at 2750'. Reamed to 3010'. Drilled to TD 3350'. Ran 81 joints of 4-1/2" 9.5# J-55 ST&C casing set at 3350'. Float guide shoe at 3350'. Cemented w/650 sacks 50/50 Poz, 3#/sack salt, .3% fluid loss and 2% CaCl<sub>2</sub>. Tailed in w/150 sacks Class "C", 3#/sacks salt and .3% fluid loss. Compressive strength of cement - 1250 psi in 12 hours. PD 3:30 AM 8-7-82. Bumped plug to 800 psi, released pressure and float held okay. Cement circulated 35 sacks to pit. WOC.

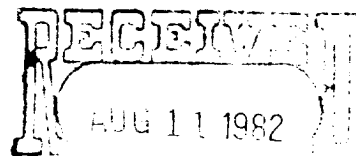

Subsurface Safety Valve: Manu. and Type

OIL & GAS  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED David R. Glass TITLE Engineering Secty DATE 8-10-82

ACCEPTED FOR RECORD  
(ORIG. SGD.) DAVID R. GLASS

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL \_\_\_\_\_

U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

See Instructions on Reverse Side