

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other (TA)

2. Name of Operator

Burnett Oil Co., Inc.

3. Address and Telephone No.

801 Cherry Street, Suite 1500, Fort Worth, TX 76102 817/332-5108

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Unit Letter B, 660' FNL, 1980' FEL, Sec. 8, T17S, R30E

5. Lease Designation and Serial No.

NM 05067

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Gissler B #4

9. API Well No.

3001504112

10. Field and Pool, or Exploratory Area

Grayburg Jackson

11. County or Parish, State

Eddy County, NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☒ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ Other

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off

☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

This well is in Temporary Abandonment (TA) status. Due to its non-commercial status and no prospect for future use, we request approval to abandon the well as follows:
(see schematics)

* Notify BLM @ (505) 887-6544 prior to commencing P&A operations.

(1) Set cast iron bridge plug @ 2600' with 35' cement on top of bridge plug.
All intervals between plugs to be filled with 9 ppg mud.

(2) Place 100' cement plug from 1350'-1450'.

* perforate squeeze holes @ ~600' and establish circulation to surface.

(3) Place 600' cement plug from surface to 600', inside of 7" casing and in 7" x 8 5/8" annulus.

(4) Install 4" X 10' pipe embedded in cement and extending 4' above ground with required inscription.

(5) Restore surface as required by authorized BLM officer.

14. I hereby certify that the foregoing is true and correct.

Signed

Title Production Superintendent

Date 1/3/91

(This space for Federal or State office use)

Approved by

Title

Date 6/11/91

Conditions of approval, if any:


NOTE: All changes & additions as per telecon w/ J.C. McPhaul, 6/11/91.

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

GISSLER B #4
NW/NE SEC 8
T17S, R30E
EDDY COUNTY, NM

PRESENT STATUS

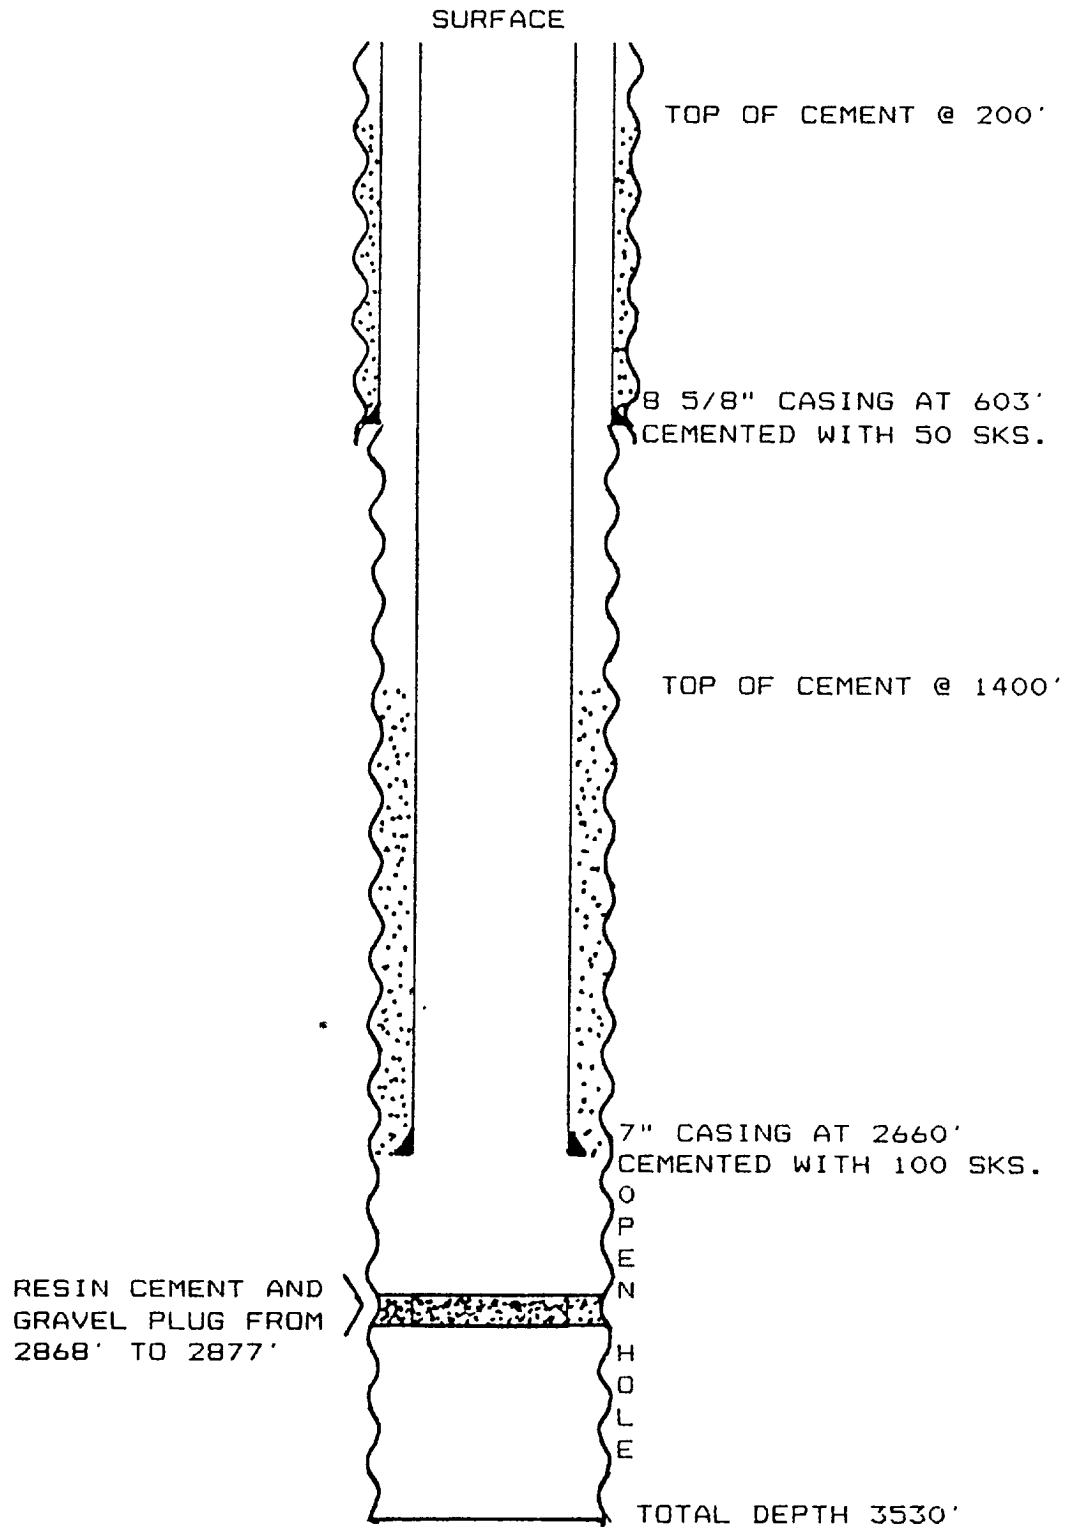

GISSLER B #4
NW/NE SEC 8
T17S, R30E
EDDY COUNTY, NM

PROPOSED P&A
STATUS

SURFACE

FILL ANNULAR SPACE BEHIND 8 5/8" CSG.
W/SUFFICIENT CMT TO PROVIDE
COVERAGE FROM 50' TO SURFACE.

TOP OF CEMENT @ 200'

PERFORATE @ ~600', establish circulation
to surface, CMT. W/ SUFFICIENT VOLUME
TO CIRCULATE CMT TO SURFACE AS SHOWN

8 5/8" CASING AT 603'
CEMENTED WITH 50 SKS. Salt @ ~550'

1350'

100' CMT PLUG FROM 1350'-1450'

1450'

TOP OF CEMENT @ 1400'

9.0 ppg

M
U
D

M
U
D

Queen @ ~2075'

CIBP @ 2600' W/ 35' CMT CAP

CIBP

7" CASING AT 2660'
CEMENTED WITH 100 SKS.

O
P
E
N

H
O
L
E

RESIN CEMENT AND
GRAVEL PLUG FROM
2868' TO 2877'

San Andres @ 2790'

TOTAL DEPTH 3530'