

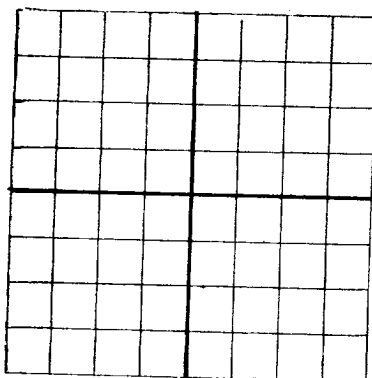
N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Etz Oil Co., Inc.

Company or Operator

Roswell, New Mexico

Address

State

Well No. 3

in NE SW of Sec.

16

T. 17

R. 30

N. M. P. M.

Grayburg

Field,

Eddy

County.

Well is 3630 feet south of the North line and 3300 feet west of the East line of section 16

If State land the oil and gas lease is No. B-936

Assignment No.

Contract with Humble Oil & Ref. Co.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced August 8

1936

Drilling was completed

Nov. 20

1936

Name of drilling contractor Etz Oil Company

Address

Roswell, New Mexico

Elevation above sea level at top of casing 3670 feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from 2885 to 2895

No. 4, from

to

No. 2, from 3068 to 3074

No. 5, from

to

No. 3, from 3185 to 3187

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 396 to 400 feet.

No. 2, from 410 to 412' 3 balers per hour

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10"	40	8		432					
5"OD	17			2630	Drive				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2"	10"	432			10#	Mud to surface
	5 OD	2630	80	Haliburton	10#	Mud to surface

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	2000	12-2-36	3150	no
		Acid	2000	3-2-37	3150	3150
		Nitro-glycerin	100	4-26-37	3000	

Results of shooting or chemical treatment No benefit from either acid treatment. Before shot swabbing about 5 bbls per day; after shot, well flowed 30 to 35 bbls per day.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 3253 feet, and from feet to feet

PRODUCTION

Put to producing April 26, 1937

The production of the first 24 hours was barrels of fluid of which % was oil; emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

K. R. Swanburg Driller J. W. Jones Driller
H. W. Etz Jr. Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12th

Roswell, New Mexico 5-12-1937

May 1937

Name A. N. Etz

T. J. Jackson

Position Secretary

Notary Public

Etz Oil Company

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	396		Sand, gyp and red beds
396	400		Water
400	410		Red beds
410	412		Water
412	538		Red beds, gyp
538	998		Salt
998	1565		Anhy, red shale, salt, red beds. show gas 1540
1565	1575		Grey lime
1575	2050		Anhy.
2050	2055		Blue shale
2055	2095		Red sand hard
2095	2463		Anhy, lime
2463	3253		Lime.
3253			Total depth