

N.


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

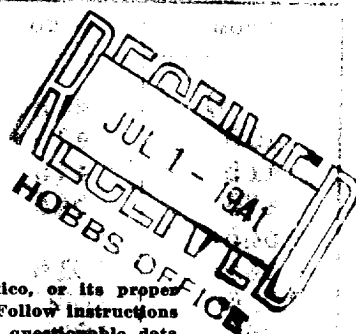

Bts Oil Company, Inc. - 2400 Nichols Hotel Bldg., Roswell, New Mexico

Company or Operator

Sta-State

Well No.

2-3

of Sec.

16

T.

178

R. 502

N. M. P. M.

Graham-Jackson

Bldg.

County.

Well is 2970 feet south of the North line and 2310 feet west of the East line of Section 16

If State land the oil and gas lease is No. 2-1483 Assignment No. 5

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced May 4, 1941 19 Drilling was completed June 11, 1941 19

Name of drilling contractor Bts Oil Company, Inc. Address Roswell, N M

Elevation above sea level at top of casing 2674 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 1555- Gas to 2077 No. 4, from 2077 to 2084-011

No. 2, from 1625 to 1640-Gas Increase from to

No. 3, from 1695 to 1700-Gas Increase from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 405 to 415--15 barrels per hour

No. 2, from to feet.

No. 2, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8 1/2"	22 1/2		2nd hd 445'					
6-5/8 OD 20 1/2			Lap-weld 1870'		Reg.			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
	8 1/2"	445'	25	Haliburton	10 1/2	2- tons
	6-5/8 OD 1870'		50	Haliburton	10 1/2	2- tons

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 2004 feet, and from feet to feet

PRODUCTION

Put to producing June 11, 1941 19

The production of the first 24 hours was 264 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

H. W. Bts Jr Driller John S. Donahue T-Dresser Driller
Wm H. Nelson Driller D. E. Webb Jr T-Dresser Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 28

day of June 19 41

T. J. Jackson
Notary Public.

Roswell, New Mexico June 28, 1941

Name A. N. Eddy

Position Secretary

Representing Bts Oil Company

