


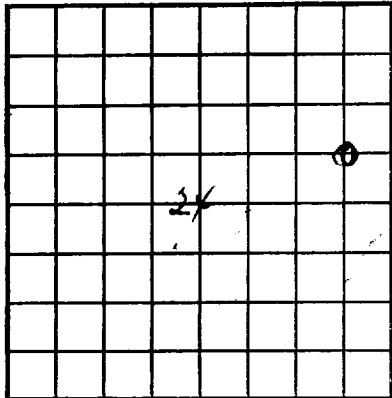

LOCATE WELL CORRECTLY

Company Nash, Windfohr and Brown Address 1107 Continental Life Bldg., Fort Worth, Texas
Lessor or Tract Jackson B Field Fren State New Mexico
Well No. 16-B Sec. 24 T. 17 R. 30 Meridian NMPM County Eddy
Location 1980 ft. {N.} of S. Line and 660 ft. {E.} of E. Line of Section 24 Elevation _____
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed E. R. McPhaul, Superintendent
Date March 5, 1945 Title _____

The summary on this page is for the condition of the well at above date.
Commenced drilling November 29, 1944 Finished drilling December 22, 1944

OIL OR GAS SANDS OR ZONES
(Denote gas by G)

No. 1, from 1922 to 1927 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8 1/2"	525			50 sacks					
7"	1861			100 sacks					
HISTORY OF OIL OR GAS WELL									

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 1/2"	525	50 sacks	Halliburton	and mud	
7"	1861	100 sacks	Halliburton	and mud	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
Shot well with 310 quarts of Nitro-Glycerin from 1920-2000 feet. Work was done by the New Mexico Glycerin Company						

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from 0 feet to 2000 feet, and from _____ feet to _____ feet

DATES

_____, 19____ Put to producing January 2, 1945
The production for the first 24 hours was 75 barrels of fluid of which 100 % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, °Bé. 39°
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Homer Lowrey, Driller B. N. Morgan, Driller
H. A. Dewey, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	160		Sandy Shale
160	260		Shale
260	295		Anhydrite
295	300		Red Beds
300	435		Anhydrite
435	455		Shale
455	515		Anhydrite and Shale
515	520		Shale
520	1275		Salt
1275	1420		Anhydrite
1420	1550		Anhydrite and Shale
1550	1675		Anhydrite
1675	1725		Broken Anhydrite
1725	1880		Anhydrite
1880	1920		Brown Lime and Anhydrite
1920	1922		Lime
1922	1927		Oil Sand
1927	1935		Lime
1935	1945		Brown Lime and Anhydrite
1945	1955		Sand
1955	1985		Anhydrite
1985	2000		Brown Lime
200 0			TOTAL DEPTH

U. S. LAND OFFICE
SERIAL NUMBER
LEASE OR PERMIT TO PROSPECT

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Completed drilling November 22, 1944. Finished drilling December 23, 1944.

The summary on this page is for the condition of the well at above date.

Date March 2, 1945 Title _____

Signed: E. H. Johnson, Superintendent

The information given herewith is a complete and correct record of the well and all work done thereon.

Location 1200 ft. S. of line and 600 ft. W. of line of section 34.

Well No. 1-2 Sec. 2, T. 25 N. R. 25 E. Meridian 121W. County _____ State _____

Lessor or Trust _____

Company _____

Address _____

1107 Commercial Ave. Bldg. _____

LOCATE WELL CORRECTLY

Oil or Gas Sands or Zones

No. 1, from 1932 to 1937		No. 2, from 1937 to 1938		No. 3, from 1938 to 1939	
1932	1937	1937	1938	1938	1939

IMPORTANT WATER SANDS

No. 1, from	No. 3, from
No. 2, from	No. 4, from

CASING RECORD

[illegible]

It is of the greatest importance to have a complete history of the well. If the well was changed in its casing, size, depth, and if any casing was "tracked" or left in the well, give its size and location. If the well has been dynamited, give date, size, position, and number of shots. If plugs or bridges were put in to test for water, state kind of material used, position, and results of pumping or bailing.

HISTORY OF OIL OR GAS WELL

FROM -		TO -		TOTAL FEET		FORMATION	
200.0	198.5	2000	1985				
198.5	197.5	1985	1975				
197.5	196.5	1975	1965				
196.5	195.5	1965	1955				
195.5	194.5	1955	1945				
194.5	193.5	1945	1935				
193.5	192.5	1935	1925				
192.5	191.5	1925	1915				
191.5	190.5	1915	1905				
190.5	189.5	1905	1895				
189.5	188.5	1895	1885				
188.5	187.5	1885	1875				
187.5	186.5	1875	1865				
186.5	185.5	1865	1855				
185.5	184.5	1855	1845				
184.5	183.5	1845	1835				
183.5	182.5	1835	1825				
182.5	181.5	1825	1815				
181.5	180.5	1815	1805				
180.5	179.5	1805	1795				
179.5	178.5	1795	1785				
178.5	177.5	1785	1775				
177.5	176.5	1775	1765				
176.5	175.5	1765	1755				
175.5	174.5	1755	1745				
174.5	173.5	1745	1735				
173.5	172.5	1735	1725				
172.5	171.5	1725	1715				
171.5	170.5	1715	1705				
170.5	169.5	1705	1695				
169.5	168.5	1695	1685				
168.5	167.5	1685	1675				
167.5	166.5	1675	1665				
166.5	165.5	1665	1655				
165.5	164.5	1655	1645				
164.5	163.5	1645	1635				
163.5	162.5	1635	1625				
162.5	161.5	1625	1615				
161.5	160.5	1615	1605				
160.5	159.5	1605	1595				
159.5	158.5	1595	1585				
158.5	157.5	1585	1575				
157.5	156.5	1575	1565				
156.5	155.5	1565	1555				
155.5	154.5	1555	1545				
154.5	153.5	1545	1535				
153.5	152.5	1535	1525				
152.5	151.5	1525	1515				
151.5	150.5	1515	1505				
150.5	149.5	1505	1495				
149.5	148.5	1495	1485				
148.5	147.5	1485	1475				
147.5	146.5	1475	1465				
146.5	145.5	1465	1455				
145.5	144.5	1455	1445				
144.5	143.5	1445	1435				
143.5	142.5	1435	1425				
142.5	141.5	1425	1415				
141.5	140.5	1415	1405				
140.5	139.5	1405	1395				
139.5	138.5	1395	1385				
138.5	137.5	1385	1375				
137.5	136.5	1375	1365				
136.5	135.5	1365	1355				
135.5	134.5	1355	1345				
134.5	133.5	1345	1335				
133.5	132.5	1335	1325				
132.5	131.5	1325	1315				
131.5	130.5	1315	1305				
130.5	129.5	1305	1295				
129.5	128.5	1295	1285				
128.5	127.5	1285	1275				
127.5	126.5	1275	1265				
126.5	125.5	1265	1255				
125.5	124.5	1255	1245				
124.5	123.5	1245	1235				
123.5	122.5	1235	1225				
122.5	121.5	1225	1215				
121.5	120.5	1215	1205				
120.5	119.5	1205	1195				
119.5	118.5	1195	1185				
118.5	117.5	1185	1175				
117.5	116.5	1175	1165				
116.5	115.5	1165	1155				
115.5	114.5	1155	1145				
114.5	113.5	1145	1135				
113.5	112.5	1135	1125				
112.5	111.5	1125	1115				
111.5	110.5	1115	1105				
110.5	109.5	1105	1095				
109.5	108.5	1095	1085				
108.5	107.5	1085	1075				
107.5	106.5	1075	1065				
106.5	105.5	1065	1055				
105.5	104.5	1055	1045				
104.5	103.5	1045	1035				
103.5	102.5	1035	1025				
102.5	101.5	1025	1015				
101.5	100.5	1015	1005				
100.5	99.5	1005	995				
99.5	98.5	995	985				
98.5	97.5	985	975				
97.5	96.5	975	965				
96.5	95.5	965	955				
95.5	94.5	955	945				
94.5	93.5	945	935				
93.5	92.5	935	925				
92.5	91.5	925	915				
91.5	90.5	915	905				
90.5	89.5	905	895				
89.5	88.5	895	885				
88.5	87.5	885	875				
87.5	86.5	875	865				
86.5	85.5	865	855				
85.5	84.5	855	845				
84.5	83.5	845	835				
83.5	82.5	835	825				
82.5	81.5	825	815				
81.5	80.5	815	805				
80.5	79.5	805	795				
79.5	78.5	795	785				
78.5	77.5	785	775				
77.5	76.5	775	765				
76.5	75.5	765	755				
75.5	74.5	755	745				
74.5	73.5	745	735				
73.5	72.5	735	725				
72.5	71.5	725	715				
71.5	70.5	715	705				
70.5	69.5	705	695				
69.5	68.5	695	685				
68.5	67.5	685	675				
67.5	66.5	675	665				
66.5	65.5	665	655				
65.5	64.5	655	645				
64.5	63.5	645	635				
63.5	62.5	635	625				
62.5	61.5	625	615				
61.5	60.5	615	605				
60.5	59.5	605	595				
59.5	58.5	595	585				
58.5	57.5	585	575				
57.5	56.5	575	565				
56.5	55.5	565	555				
55.5	54.5	555	545				
54.5	53.5	545	535				
53.5	52.5	535	525				
52.5	51.5	525	515				
51.5	50.5	515	505				
50.5	49.5	505	495				
49.5	48.5	495	485				
48.5	47.5	485	475				
47.5	46.5	475	465				
46.5	45.5	465	455				
45.5	44.5	455	445				
44.5	43.5	445	435				
43.5	42.5	435	425				
42.5	41.5	425	415				
41.5	40.5	415	405				
40.5	39.5	405	395				
39.5	38.5	395	385				
38.5	37.5	385	375				
37.5	36.5	375	365				
36.5	35.5	365	355				
35.5	34.5	355	345				
34.5	33.5	345	335				
33.5	32.5	335	325				
32.5	31.5	325	315				
31.5	30.5	315	305				
30.5	29.5	305	295				
29.5	28.5	295	285				
28.5	27.5	285	275				
27.5	26.5	275	265				
26.5	25.5	265	255				
25.5	24.5	255	245				
24.5	23.5	245	235				
23.5	22.5	235	225				
22.5	21.5	225	215				
21.5	20.5	215	205				
20.5	19.5	205	195				
19.5	18.5	195	185				
18.5	17.5	185	175				
17.5	16.5	175	165				
16.5	15.5	165	155				
15.5	14.5	155	145				
14.5	13.5	145	135				
13.5	12.5	135	125				
12.5	11.5	125	115				
11.5	10.5	115	105				
10.5	9.5	105	95				
9.5	8.5	95	85				
8.5	7.5	85	75				
7.5	6.5	75	65				
6.5	5.5	65	55				
5.5	4.5	55	45				
4.5	3.5	45	35				
3.5	2.5	35	25				
2.5	1.5	25	15				
1.5	0.5	15	5				
0.5	0.0	5	0				