


ARTESIA OFFICE COPY


Form 9-330

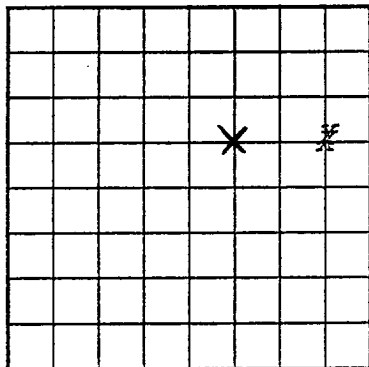

LOCATE WELL CORRECTLY

U. S. LAND OFFICE Las Cruces
SERIAL NUMBER 055264
LEASE OR PERMIT TO PROSPECT _____

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

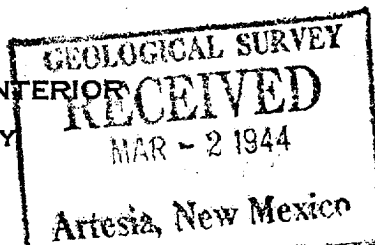

LOG OF OIL OR GAS WELL

Company Nash-Windfohr-Brown Co. Address 1107 Ft. Worth Natl. Bank Bldg.
Lessor or Tract Jackson Field Grayburg State New Mexico
Well No. 10B Sec. 25 T. 17 R. 30 Meridian N.M.P.M. County Eddy
Location 1980 ft. S. of N. Line and 680 ft. W. of E. Line of Sec. 25 Elevation _____
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed Nash-Windfohr-Brown Co.

Date March 2, 1944

Title J. C. Williams, agent

The summary on this page is for the condition of the well at above date.

Commenced drilling Sept. 8, 1943 Finished drilling November 1, 1943

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from _____ to _____ No. 4, from 2473 to 2475 G
No. 2, from _____ to _____ No. 5, from 3250 to 3265
No. 3, from 2009 to 2020 No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from 385 to 405 No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>8 1/2</u>	<u>515</u>	<u>100</u>	<u>Halliburton</u>	<u>515</u>	<u>Texas</u>	<u>from top of hole to 100 ft. below</u>			<u>Water</u>
<u>7</u>	<u>3130</u>	<u>100</u>	<u>Halliburton</u>	<u>3130</u>	<u>Texas</u>	<u>from 100 ft. below to 3130 ft.</u>			<u>Oil</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>8 1/2</u>	<u>515</u>	<u>50</u>	<u>Halliburton</u>		<u>50</u>
<u>7</u>	<u>3130</u>	<u>100</u>	<u>Halliburton</u>		<u>80</u>

MARK

