


N

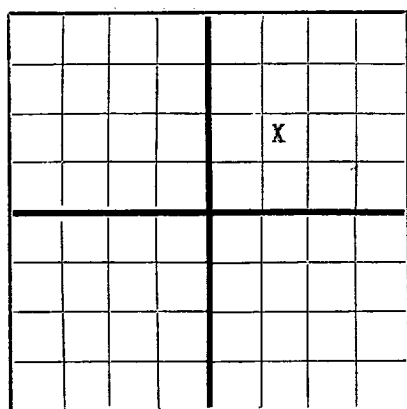

AREA 640 ACRES  
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

ROLAND RICH WOOLLEY  
Company or Operator  
AROLD  
Well No. 9-B in NE 1/4 SW 1/4 NE 1/4 of Sec. 27, T. 17S, R. 30, N. M. P. M., PREN Field, EDDY County.  
Well is 1650 feet south of the North line and 1650 feet west of the East line of 27-17-30  
If State land the oil and gas lease is No. Assignment No.  
If patented land the owner is ROLAND RICH WOOLLEY, Address SAME  
If Government land the permittee is AROLD, Address SAME  
The Lessee is SAME, Address SAME  
Drilling commenced 4-28 19 49 Drilling was completed 5-28 19 49  
Name of drilling contractor SAME, Address SAME  
Elevation above sea level at top of casing feet.  
The information given is to be kept confidential until NONE 19

## OIL SANDS OR ZONES

No. 1, from 1930 to 1975 No. 4, from to  
No. 2, from to No. 5, from to  
No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.  
No. 2, from to feet.  
No. 3, from to feet.  
No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8"	28	8	NAT.	483	TMX.				
7" OD	20	8	NAT.	1899	PACKER				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
10	8 5/8	483	50	HALLIBURTON	HEAVY	40 BBLs.
8	7	1899	100	" "	"	TOP TO BOTTOM

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set  
Adapters — Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5"	7	GLYCERIN	210	5-24-49	1950-1975	T. D.

Results of shooting or chemical treatment SHABBED 12 BBLs.

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet  
Cable tools were used from 0 feet to 1986 feet, and from feet to feet

## PRODUCTION

Put to producing 5-28 19 49  
The production of the first 24 hours was 12 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be.  
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas  
Rock pressure, lbs. per sq. in. 150 BBLs.

## EMPLOYEES

W. H. SETTLEMIRE, Driller R. M. BRUNDAGE, Driller  
CARL C. ROTHROCK, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 1st

day of June 19 49

Notary Public

My Commission expires Apr 15, 1952

ARTESIA, NEW MEXICO

6-1-49

Name J. P. Brundage

Position SUPT.

Representing ROLAND RICH WOOLLEY

Company or Operator

Address BOX 456, ARTESIA, NEW MEXICO

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	10	10	RED SAND
10	20	10	CALECHE
20	345	335	RED BED
335	375	40	ANHY.
			WATER 385
375	472	97	RED BED
472	1290	818	SALT
1290	1800	510	ANHY.
1800	1820	20	ANHY., BROWN & GRAY LIME
			S. O. 1823
1820	1865	45	ANHY.
1865	1900	35	ANHY. & GRAY LIME
1900	1939	39	ANHY.
1939	1949	10	ANHY. & BENTENITE
1949	1954	05	GRAY & BROWN LIME WITH OIL SHOW
1954	1960	06	ANHY. & BENTENITE
1960	1968	08	BROWN LIME, OIL SHOW
1968	1975	07	BROWN LIME & ANHY.
1975	1986	11	ANHY.
1986	T. D.		