

COPY TO O. C. C.

U. S. LAND OFFICE Las Cruces
SERIAL NUMBER 028936 (a)
LEASE OR PERMIT TO PROSPECT

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

RECEIVED
APR 13 1953
L. L. GREGG, JR.
ARTESIA, NEW MEXICO

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company Roland Rich Woolley Address Box 398, Loco Hills
 Lessor or Tract same Field Fren State New Mexico
 Well No. Woolley 4-C Sec. 28 T. 17S R. 30E Meridian N.M.P.M. County Eddy
 Location 1650 ft. N of N Line and 2310 ft. E of W Line of 28 Elevation 3634'
 (Derrik floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed

~~Title~~ Superintendent

Date April 8, 1953

The summary on this page is for the condition of the well at above date.

Commenced drilling 2/21....., 1953 Finished drilling 3/24....., 1953

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 1885' to 1891' and from 1891' to 1899'.

No. 2, from 1900 to 1905 No. 5, from 1905 to 1910

No. 3, from 12-1-1941 to 12-31-1941 No. 6, from 1-1-1942 to 1-31-1942

IMPORTANT WATER SANDS

No. 1, from 335' to 352' No. 3, from _____ to _____

No. 2, from POLSKA, 1911 to 1922, No. 4, from 1923 to 1929

CASING RECORD

CASH RECEIPTS						Perforated		Purpose
Size casing	Weight per foot	Threads per inch	Amount	Kind of shoe	Cut and pulled from	From—	To—	
7" 5p	20# 14p	8rd 8rd	Natl. 462' 1965	Tex. Fat.				
History of Oil of C&G Well								

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
7"	462'	50	Halliburton	heavy	top to bottom
5 1/2"	1865'	50	Denton	"	" " "

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____

Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
5"	Zero hour	Solidified O. W. L.	180	3/25/53	1886-1930'	to bottom

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

Cable tools were used from 0 feet to 1930 feet, and from _____ feet to _____ feet

DATES


Put to producing 4/4, 19 53

The production for the first 24 hours was 12 barrels of fluid of which 100 % was oil; ----- % emulsion; ----- % water; and ----- % sediment. Gravity, °Bé. -----

If gas well, cu. ft. per 24 hours **none** Gallons gasoline per 1,000 cu. ft. of gas

COPY TO O.C.C.

U.S. LAND OFFICE
SERIAL NUMBER
PLEASE OR PERMIT TO PROSPECT

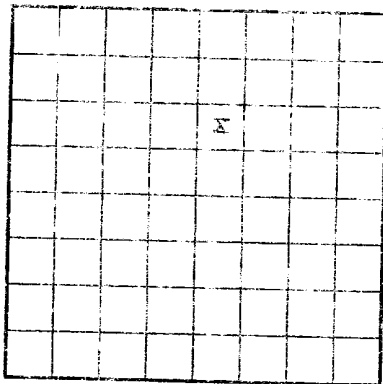

LOCATE WELL CORRECTLY

LOG OF OIL OR GAS WELL

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Company Continental Oil Company
Location Section 26, T. 13N. R. 30E. Meridian 10W.
Well No. 10
The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Date April 2, 1930
The summary on this page is for the condition of the well at above date.

Completed drilling 1930
Cemented out this well with oil and after shot and before the shot there was oil in the well.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.


On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

On March 26, 1930 we shot this well with 180 lbs of solidified of shot gravel for 180 lbs of solidified from 1930 to 1930.

COPY TO O. C. C.

U. S. LAND OFFICE Las Cruces
SERIAL NUMBER 028936 (a)
LEASE OR PERMIT TO PROSPECT

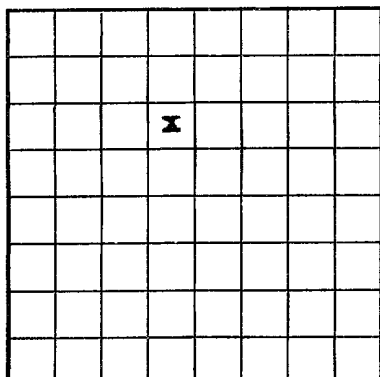

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

APR 13 1953
L. ECOLOGICAL
ARTESIA, NEW MEXICO

LOG OF OIL OR GAS WELL

Company Roland Rich Woolley Address Box 398, Loco Hills
 Lessor or Tract same Field Fren State New Mexico
 Well No. Woolley 4-C Sec. 28 T. 17S R. 30E Meridian N.M.P.M. County Eddy
 Location 1650 ft. { N } of N Line and 2310 ft. { E } of W Line of 28 Elevation 3634'
 { S } { W } (Overick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed J. F. Briscoe

Date April 8, 1953 Title Superintendent

The summary on this page is for the condition of the well at above date.

Commenced drilling 2/21, 19 53 Finished drilling 3/24, 19 53

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1 from 1885' to 1891' No. 4 from 1891' to 1899'

No. 2, from 1900 to 1905 No. 5, from 1906 to 1910

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from 335' to 352' No. 3, from _____ to _____

No. 2 from POLYNESIA to 200 MG 100% FOL, No. 4 from 200 MG 100% FOL to 1000

CASING RECORD

Size casing	Weight per foot	Threads per inch	Name	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
7" 5/8"	20#	8rd	Natl. 462'	Tex. Cat.					
	14#	6rd		1665					

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
7"	462'	50	Halliburton	heavy	top to bottom
5 1/2"	1865'	50	Denton	"	" " "

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____

Adapters—Material	Size
-------------------	------

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
5"	Zero hour	Solidified O.W.A.	180	3/25/53	1886-1930'	to bottom

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

Cable tools were used from 0 feet to 1930 feet, and from _____ feet to _____ feet.

DATES

Put to producing 4/4, 1953

The production for the first 24 hours was 12 barrels of fluid of which 100 % was oil; ----- % emulsion; ----- % water; and ----- % sediment. Gravity, °Bé. -----

If gas well, cu. ft. per 24 hours none Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. -----

EMPLOYEES

W. H. Settlemire, Driller Geo. Sands, Driller

W.C. Karr _____, Driller O.L. Anderson _____, Driller

FORMATION RECORD