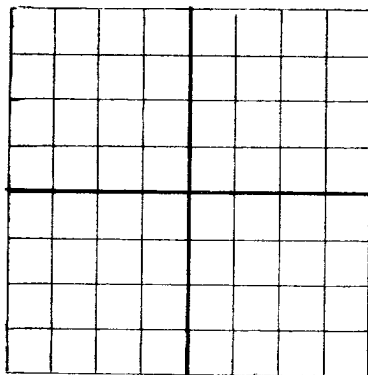


N

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## WELL RECORD

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Republic Oil Company Tulsa, Oklahoma  
 Company or Operator Address  
C. F. Beegon "A" Well No. 3 in SW 1/4 SE of Sec. 28, T. 17  
 R. 30 N. M. P. M. Artesia Field, Adair County.  
 Well is 1650 feet north of the xxx line and 320 feet west of the East line of Section 28  
 If State land the oil and gas lease is No. \_\_\_\_\_ Assignment No. \_\_\_\_\_  
 If patented land the owner is \_\_\_\_\_ Address \_\_\_\_\_  
 If Government land the permittee is \_\_\_\_\_ Address \_\_\_\_\_  
 The Lessee is \_\_\_\_\_ Address \_\_\_\_\_  
 Drilling commenced August 3, 19 38 Drilling was completed October 15 19 38  
 Name of drilling contractor \_\_\_\_\_ Address \_\_\_\_\_  
 Elevation above sea level at top of casing \_\_\_\_\_ feet.  
 The information given is to be kept confidential until \_\_\_\_\_ 19 \_\_\_\_\_.

## OIL SANDS OR ZONES

No. 1, from 3100 to 3202 No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
 No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
 No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from \_\_\_\_\_ to \_\_\_\_\_ feet.  
 No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet.  
 No. 3, from \_\_\_\_\_ to \_\_\_\_\_ feet.  
 No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8"	28	8		532	TP				
2" OD	24	10		3025	Float				
2" Reg. SS Tubing				3206					

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
	8 5/8"	532	50	Halliburton		
	7" OD	3025	100	Halliburton		4 ton

## PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_  
 Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5"	16'	Nitroglycerin	60	9-17-38	3191-3207	3268

Results of shooting or chemical treatment \_\_\_\_\_

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet  
 Cable tools were used from 0 feet to 3206 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

## PRODUCTION

Put to producing 9-18-38, 19 \_\_\_\_\_.  
 The production of the first 24 6 hours was 56 barrels of fluid of which 100 % was oil; \_\_\_\_\_ %  
 emulsion; \_\_\_\_\_ % water; and \_\_\_\_\_ % sediment. Gravity, Be \_\_\_\_\_  
 If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
 Rock pressure, lbs. per sq. in. \_\_\_\_\_

## EMPLOYEES

R. A. Manahan Driller J. T. Henry Driller  
O. T. Hays Driller \_\_\_\_\_ Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this \_\_\_\_\_

Tulsa, Okla

Place

Date

day of \_\_\_\_\_, 19 \_\_\_\_

Name L. SurrattPosition Dist. Supt.Representing Repollo Oil Co.

Company or Operator

Address Tulsa, Okla.

Notary Public

My Commission expires \_\_\_\_\_

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	285		Sand & red beds
285	410		Anhy
410	420		Sand (Water hole full)
420	512		Red rock
512	635		Salt
635	1425		Salt and anhy
1425	2530		Anhy
2530	3190		Lime
3190	3202		Sandy lime show oil 1500'
3220	3268		Lime
3268			Total depth