


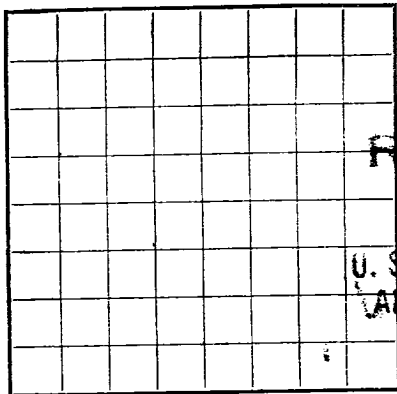

LOCATE WELL CORRECTLY

RECEIVED

JUN 14 1962

U. S. GEOLOGICAL SURVEY
ALBUQUERQUE, NEW MEXICO

UNITED STATES

DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

RECEIVED

JUN 14 1962

O. C. C.
ALBUQUERQUE, OFFICE

LOG OF OIL OR GAS WELL

Company General American Oil Co. of Texas Address P. O. Box 416, Loco Hills, N. M.
Lessor or Tract Beeson F Field Loco Hills State New Mexico
Well No. 13 Sec. 31 T. 17-S R. 30-E Meridian N.M.P.M. County Eddy
Location 2310 ft. [N.] of 8 Line and 2232 ft. [E.] of 4 Line of Section 31 Elevation 2562'
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon
so far as can be determined from all available records.

Signed R. J. HeardTitle District SuperintendentDate June 11, 1962

The summary on this page is for the condition of the well at above date.

Commenced drilling May 2, 1962 Finished drilling June 4, 1962OIL OR GAS SANDS OR ZONES
(Denote gas by G)

No. 1, from 2805' to 2823' No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from 330 to 335 No. 3, from _____ to _____
No. 2, from 365 to 375 No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>10 3/4"</u>	<u>22.7</u>	<u>8rd</u>	<u>Used</u>	<u>2798'</u>	<u>Pattern</u>	<u>2800-2827</u>			<u>Production String</u>
<u>7"</u>	<u>23</u>	<u>8rd</u>	<u>Used</u>	<u>2798'</u>	<u>Pattern</u>	<u>2800-2827</u>			<u>Production String</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>10 3/4"</u>	<u>423</u>	<u>Obtained formation shut-off.</u>			
<u>7"</u>	<u>2800</u>	<u>394</u>	<u>Pump & Plug</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
		<u>20% Mud Acid</u>	<u>500</u>	<u>6-4-62</u>	<u>2800-2827</u>	

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

Put to producing _____, 1962
The production for the first 24 hours was 3 barrels of fluid of which 100% was oil; 0%
emulsion; 0% water; and 0% sediment. Gravity, °Be. 36.00
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____, Driller
O. L. Anderson, Driller
W. M. Clark, Driller
I. B. Harper, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
<u>0</u>	<u>90</u>	<u>90</u>	<u>Sand</u>
<u>90</u>	<u>250</u>	<u>160</u>	<u>Red Beds & Gyp</u>
<u>250</u>	<u>345</u>	<u>95</u>	<u>Anhy</u>
<u>345</u>	<u>365</u>	<u>20</u>	<u>Red Shale</u>
<u>365</u>	<u>375</u>	<u>10</u>	<u>Gravel</u>
<u>375</u>	<u>450</u>	<u>75</u>	<u>Red Bed & Anhy</u>
<u>450</u>	<u>1120</u>	<u>670</u>	<u>Salt</u>
<u>1120</u>	<u>1290</u>	<u>170</u>	<u>Anhy</u>
<u>1290</u>	<u>1405</u>	<u>115</u>	<u>Broken Anhy</u>
<u>1405</u>	<u>2000</u>	<u>595</u>	<u>Anhy</u>
<u>2000</u>	<u>2260</u>	<u>260</u>	<u>Broken Anhy</u>
<u>2260</u>	<u>2290</u>	<u>30</u>	<u>Anhy</u>
<u>2290</u>	<u>2313</u>	<u>23</u>	<u>Red Sand</u>
<u>2313</u>	<u>2350</u>	<u>37</u>	<u>Shale & Anhy</u>
<u>2350</u>	<u>2375</u>	<u>25</u>	<u>Lime & Anhy</u>
<u>2375</u>	<u>2533</u>	<u>158</u>	<u>Broken Anhy</u>
<u>2533</u>	<u>2550</u>	<u>17</u>	<u>Red Rock</u>
<u>2550</u>	<u>2615</u>	<u>65</u>	<u>Broken Anhy</u>
<u>2615</u>	<u>2787</u>	<u>172</u>	<u>Lime</u>
<u>2787</u>	<u>2793</u>	<u>5</u>	<u>Lime & Sand</u>
<u>2793</u>	<u>2798</u>	<u>5</u>	<u>Sandy Lime</u>
<u>2798</u>	<u>2823</u>	<u>25</u>	<u>Sand</u>
<u>2823</u>	<u>2827</u>	<u>4</u>	<u>Lime</u>
			<u>GEOLOGIC TOPS</u>
			<u>Top Salt 450' (Drill.)</u>
			<u>Top Sand 1120' (Drill.)</u>
			<u>Top Grayburg 2615' (Samples)</u>

END OF COMPLETE DRILLER'S
LOG. STATE
LOG OR SAMPLEDFORMATION RECORD
Top Salt 450' (Drill.)
Top Sand 1120' (Drill.)
Top Grayburg 2615' (Samples)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Y (T07E200) LEWETABO

1000 2100 08 513 1100

FOR COUNTRIES OF SOUTH

SC-153, 2774V, 7/15/2005

CREATING A RECORD

HISTORY OF OIL OR GAS WELL

16-48004-2 U. S. GOVERNMENT PRINTING OFFICE

UNCLASSIFIED//FOR OFFICIAL USE ONLY

RECEIVED ON 2011 19

00091 27709F3

3120 JOURNAL OF CLIMATE

CLASS 2 10/07

ATTACH

233701847

Abstract

NOITAMSOE

TOTAL FEET

NOLLYBUSH

INFORMATION RECORD—Continued