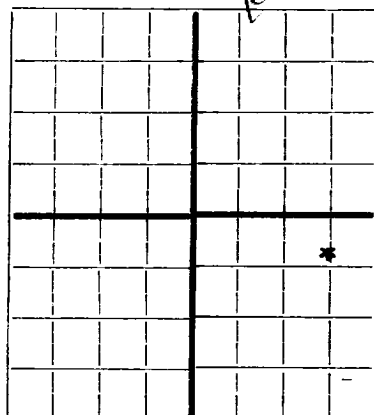


N


 AREA 640 ACRES
 LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Roland Rich Woolley P.O. Bx 368 Loco Hills New Mexico
 Company or Operator Address
 Woolley Well No. 6-D in NE 1/4 Sec 31 T 17
 Lease
 R. 30, N. M. P. M., Loco Hills Field, Eddy County.
 Well is 3023 feet south of the North line and 2254 feet west of the East line of Sec 31
 If State land the oil and gas lease is No. Assignment No.
 If patented land the owner is R.R. Woolley Address
 If Government land the permittee is Address
 The Lessee is R.R. Woolley Address Loco Hills
 Drilling commenced 7-24-47 19. Drilling was completed 8-8-1947
 Name of drilling contractor Same Address
 Elevation above sea level at top of casing 3576 feet.
 The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 2848 to 2875 No. 4, from to
 No. 2, from to No. 5, from to
 No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 365 to feet.
 No. 2, from to feet.
 No. 3, from to feet.
 No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8"	28	8	Nat	485	plain				
7"	20	8	Nat		Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
10	8	485	50	H.C.N.C. Co		Hole full
8	7	766	100	do		do

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
 Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5"	6	Glycerin	160	8-18-47	2842 -85	Total dept

Results of shooting or chemical treatment No test made before shot. Flowed 30 bbls after shot.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
 Cable tools were used from 0 feet to 2885 feet, and from feet to feet

PRODUCTION

Put to producing 9-1-1947
 The production of the first 24 hours was 30 barrels of fluid of which 100% was oil;
 emulsion; % water; and % sediment. Gravity, Be.
 If gas well, cu. ft. per 24 hours no test Gallons gasoline per 1,000 cu. ft. of gas
 Rock pressure, lbs. per sq. in.

EMPLOYEES

W. H. Settlemire, Driller W. L. Martin, Driller
 Earl E. Smith, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 2 Date Artesia N.M.